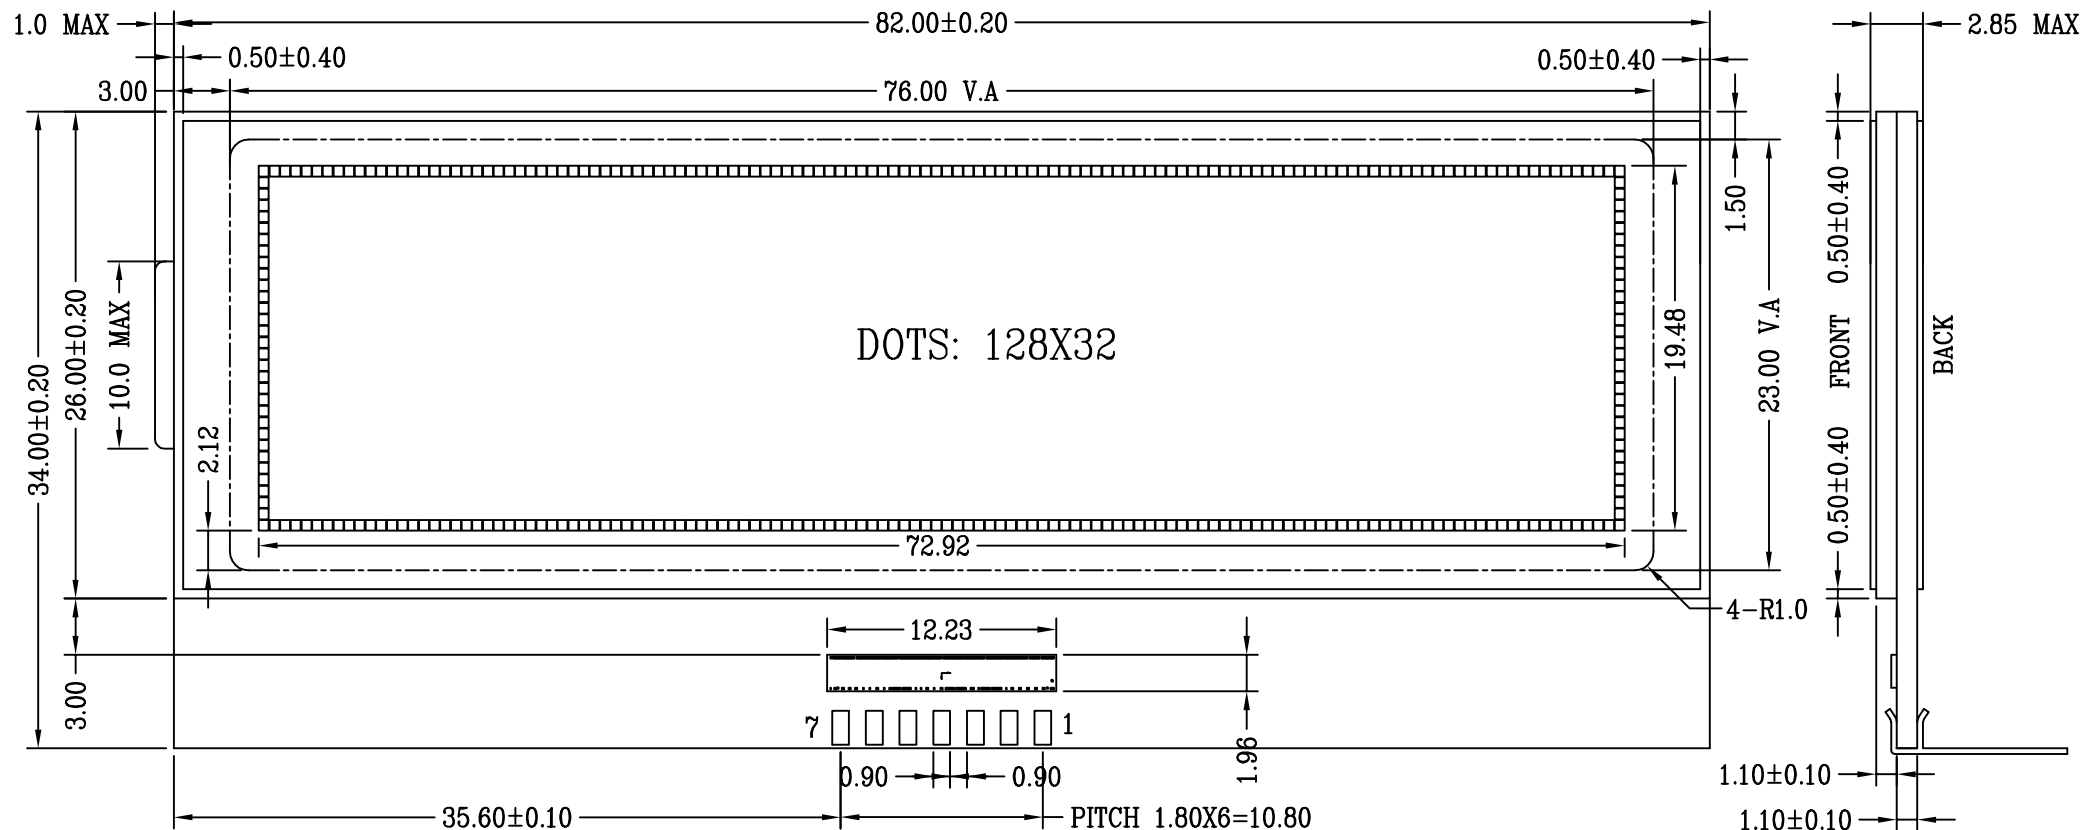


REV	B
-----	---

Designed by:	TIC105		Unit: mm
Checked by:			Sheet: 2 OF 4
Approved by:			
Filename:			

A. Dimensions:

1. Length of top glass:
_____ 82.0 ± 0.20 _____ mm

Width of top glass:
_____ 26.00 ± 0.20 _____ mm

2. Length of bottom glass:
_____ 82.00 ± 0.20 _____ mm

Width of bottom glass:
_____ 34.00 ± 0.20 _____ mm

3. Thickness of LCD(max):
_____ 2.85 _____ mm

4. Thickness of glass:
Top: _____ 1.10 _____ mm
Bottom: _____ 1.10 _____ mm

5. Length of viewing area:
Horizontal: _____ 76.00 _____ mm
Vertical: _____ 23.00 _____ mm

B. Display specification:

1. Duty: _____ $1/32$ _____

2. Bias: _____ $1/6$ _____

3. Operating voltage: _____ $2.5 \sim 5.5V$ _____

4. Viewing angle: _____ $10:30$ _____

5. Temperature:

Operating: _____ -30 TO $+85^{\circ}C$ _____

Storage: _____ -40 TO $+85^{\circ}C$ _____

6. Polarizer:

Top: _____ TRANSMISSIVE (ANTIGLARE) _____

Bottom: _____ TRANSMISSIVE _____


7. End seal: _____ LEFT _____

8. Length of pin: _____ mm

Pitch of pin: _____ 1.80 _____ mm

9. FSTN

REV B

Designed by:		TIC105	
Checked by:			
Approved by:			Unit: mm
Filename:			Sheet: 4 OF 4