


## SELECTABLE-OUTPUT CRYSTAL OSCILLATOR

## SPG series

- Capable of selecting 57 varieties of frequency output.
- Low current consumption.
- Easy to mount DIP 16-pin package.

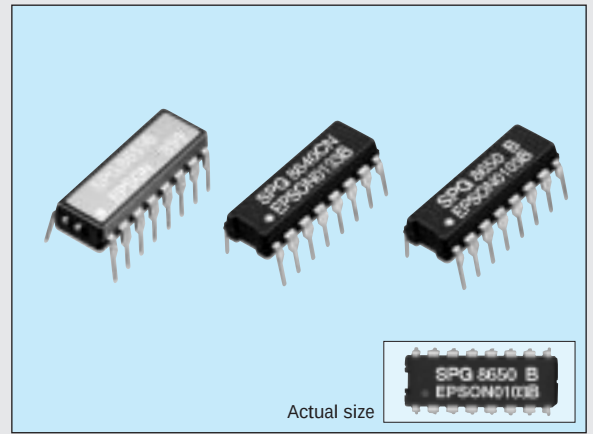

## ■ Specifications (characteristics)

| Item                                  |                       | Symbol               | Specifications             |            |            |            |        |       |             |           |                 |        |           | Remarks                                                   |                                          |
|---------------------------------------|-----------------------|----------------------|----------------------------|------------|------------|------------|--------|-------|-------------|-----------|-----------------|--------|-----------|-----------------------------------------------------------|------------------------------------------|
| Model name                            |                       |                      | 8640AN                     | 8640BN     | 8640CN     | 8650A      | 8650B  | 8650C | 8650D       | 8650E     | 8651A           | 8651B  | 8651E     |                                                           |                                          |
| Oscillation source frequency          |                       | f <sub>o</sub>       | 600kHz                     | 1MHz       | 768kHz     | 60kHz      | 100kHz | 96kHz | 153.6kHz    | 32.768kHz | 60kHz           | 100kHz | 32.768kHz | For output frequency, refer to the table in the next page |                                          |
| Power source voltage                  | Max. supply voltage   | V <sub>DD</sub> -GND | -0.3V to +7.0V             |            |            |            |        |       |             |           |                 |        |           |                                                           |                                          |
|                                       | Operating voltage     | V <sub>DD</sub>      | 5.0V±0.5V                  |            |            |            |        |       |             |           |                 |        |           |                                                           |                                          |
| Temperature range                     | Storage temperature   | T <sub>STG</sub>     | -55°C to +125°C            |            |            |            |        |       |             |           | -30°C to +80°C  |        |           |                                                           |                                          |
|                                       | Operating temperature | T <sub>OPR</sub>     | -10°C to +70°C             |            |            |            |        |       |             |           | -10°C to +60°C  |        |           |                                                           |                                          |
| Soldering condition (lead part)       |                       | T <sub>SOL</sub>     | Under 260°C within 10 sec. |            |            |            |        |       |             |           |                 |        |           | Package should be less than 150°C                         |                                          |
| Frequency tolerance                   |                       | Δf/f <sub>o</sub>    | ±100ppm                    |            |            |            | ±50ppm |       |             |           | ±5ppm *1        |        |           | V <sub>DD</sub> =5V, Ta=25°C                              |                                          |
| Frequency temperature characteristics |                       |                      | +10/-120ppm                |            |            |            |        |       |             |           |                 |        |           | V <sub>DD</sub> =5V                                       |                                          |
| Frequency voltage characteristics     |                       |                      | ±20ppm                     | ±10ppm     | ±20ppm     | ±10ppm     |        |       |             | ±5ppm     |                 |        |           | V <sub>DD</sub> =4.5 to 5.5V                              |                                          |
| Aging                                 |                       | f <sub>a</sub>       | ±5ppm/year max.            |            |            |            |        |       |             |           | ±3ppm/year max. |        |           |                                                           | V <sub>DD</sub> =5V, Ta=25°C, first year |
| Current consumption                   |                       | I <sub>OP</sub>      | 1.0mA max.                 | 2.0mA max. | 1.5mA max. | 0.5mA max. |        |       |             |           |                 |        |           | No load condition                                         |                                          |
| Shock resistance                      |                       | S.R.                 | ±5ppm max.                 |            |            | ±5ppm max. |        |       | ±10ppm max. |           |                 |        |           | Three drops on a hard wooden board from 75cm              |                                          |

\*1 Frequency tolerance of 8651 system shows the value guaranteed at the time of shipment.


■ Electric characteristics ( $V_{DD}=5V \pm 0.5V$ ,  $T_a=-10$  to  $70^\circ C$ ,  $C_L \leq 15pF$ )

| Item                                               | Symbol    | Min.            | Typ. | Max.       | Unit    | Remarks                           |
|----------------------------------------------------|-----------|-----------------|------|------------|---------|-----------------------------------|
| L. input voltage                                   | $V_{IL}$  | 0               |      | 0.8        | V       |                                   |
| H. input voltage                                   | $V_{IH}$  | $V_{DD}-1.0$    |      | $V_{DD}$   | V       |                                   |
| L. input current (Reset)                           | $I_{RL}$  | -30             |      | -5         | $\mu A$ | Reset=GND                         |
| H. input current (Reset)                           | $I_{RH}$  |                 |      | 0.5        | $\mu A$ | Reset= $V_{DD}$                   |
| L. input current (input terminal except for Reset) | $I_{IL}$  | -0.5            |      |            | $\mu A$ |                                   |
| H. input current (input terminal except for Reset) | $I_{IH}$  | 5               |      | 30         | $\mu A$ | $I_{OL}=1.6mA$                    |
| L. output voltage                                  | $V_{OL}$  |                 |      | 0.4        | V       | $I_{OH}=-40\mu A$                 |
| H. output voltage                                  | $V_{OH}$  | $V_{DD}-1.0$    |      |            | V       | $V_{OL}=0.4V$                     |
| L. output current                                  | $I_{OL}$  | 1.6             |      |            | mA      | $V_{OH}=V_{DD}-1.0V$              |
| H. output current                                  | $I_{OH}$  |                 |      | -40        | $\mu A$ |                                   |
| Output rise time                                   | $t_{RLH}$ |                 | 30   | 60         | ns      |                                   |
| Output fall time                                   | $t_{RHL}$ |                 | 25   | 50         | ns      |                                   |
| Duty                                               |           | 40              |      | 60         | %       | Except in the case of 1/3 and 1/5 |
| Min. reset pulse width                             | $t_{RW}$  | 1.0             |      |            | $\mu s$ |                                   |
| Reset delay time                                   | $t_R$     |                 |      | 1.0        | $\mu s$ |                                   |
| Reset release synchronous error                    | $t_E$     | $t_{RW}+1/2$ to |      | $t_{RW}^2$ | $\mu s$ |                                   |
| External signal input frequency                    | $F_{IN}$  |                 |      | 1M         | Hz      | 8640N only                        |
| External signal input pulse width                  | $t_{IN}$  | 0.5             |      |            | $\mu s$ |                                   |
| Oscillation start up time                          | $t_{OSC}$ |                 | 0.2  | 1          | s       | * 3                               |

\* 1  $t_{OSC}$ =oscillation source cycle. \* 2  $t_{RW}=1/2$  cycle of preset frequency.

\* 3 For more than 1ms until  $V_{DD}=0 \rightarrow 4.5V$ . Time at 4.5V is to be 0.


## ■ Block diagram

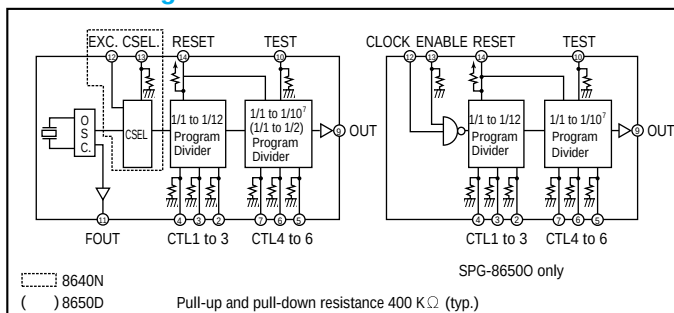

## ● Divider IC (without quartz crystal)


| Item                  | Symbol   | Specifications | Remarks           |
|-----------------------|----------|----------------|-------------------|
| Model name            |          | 8650 O         |                   |
| Input clock frequency |          | 1 MHz max.     |                   |
| Current consumption   | $I_{OP}$ | About 2 mA     | No load condition |

## ■ RESET timing

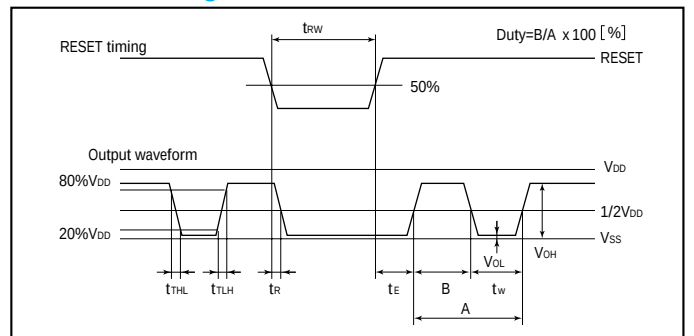

## ■ External dimensions

(Unit: mm)

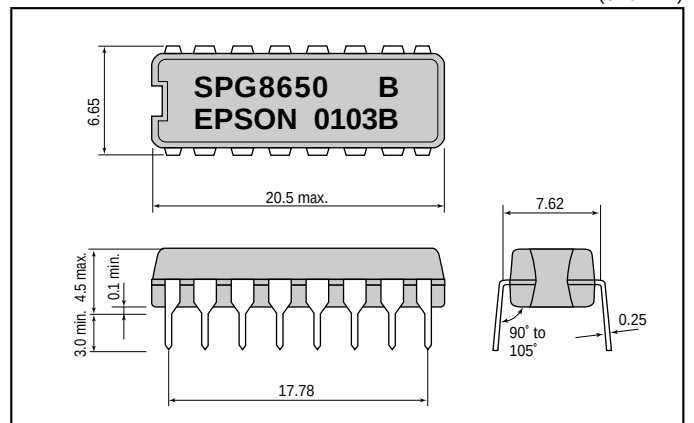

## Terminal connection

| No. | Pin terminal | No. | Pin terminal    |
|-----|--------------|-----|-----------------|
| 1   | NC           | 16  | V <sub>DD</sub> |
| 2   | CTL 3        | 15  | NC              |
| 3   | CTL 2        | 14  | RESET           |
| 4   | CTL 1        | 13  | NC (CSEL)       |
| 5   | CTL 6        | 12  | NC (EXC)        |
| 6   | CTL 5        | 11  | FOUT            |
| 7   | CTL 4        | 10  | TEST            |
| 8   | GND          | 9   | OUT             |

( ) shown 8640N only

For 8650 O

11. NC 12. CLOCK 13. ENABLE

NC: Do not connect to the external terminal.

## Explanation of terminal

- (a) CTL 1 to 6 : Programs dividing ratio. (pull-down resistor incorporated.)
- (b) OUT : Output frequency preset by CTL1 to 6.  
(refer to the procedure for setting output frequency.)
- (c) FOUT : Constantly outputs the oscillation source frequency of builtin crystal unit.
- (d) RESET : Stops output at RESET= "L".  
(pull-up resistor incorporated.)
- (e) TEST : Used for the input terminal for testing. When CTL4 is H, output will be 1000 times larger than the preset value at TEST= "H". (pull-down resistor incorporated.)
- (f) EXC (8640N only) : Serves as input terminal when using an external clock by changing to the builtin oscillator.  
Effective only when CSEL is H.
- (g) CSEL (8640N only) : When this terminal is made H, the external clock is selected.  
(pull-down resistor incorporated.)

(Note) Treatment of empty terminals. When RESET terminal is not used, this should be connected to V<sub>DD</sub>, and when TEST terminal, CSEL terminal, and CTL 1 to 6 terminals are not used, to GND.

## Explanation of terminal (8650 O)

- (a) CLOCK: Clock input (max. 1 MHz) (b) ENABLE: Be sure to connect to V<sub>DD</sub>

### Setting of divider output

| CTL1 | CTL2 | CTL3 | Dividing ratio | CTL4 | CTL5 | CTL6 | Dividing ratio                       |
|------|------|------|----------------|------|------|------|--------------------------------------|
| 0    | 0    | 0    | 1/1            | 0    | 0    | 0    | 1/1 (1/1)                            |
| 0    | 0    | 1    | 1/10           | 0    | 0    | 1    | 1/10 (1/2)                           |
| 0    | 1    | 0    | 1/2            | 0    | 1    | 0    | 1/10 <sup>2</sup> (1/2) <sup>2</sup> |
| 0    | 1    | 1    | 1/3            | 0    | 1    | 1    | 1/10 <sup>3</sup> (1/2) <sup>3</sup> |
| 1    | 0    | 0    | 1/4            | 1    | 0    | 0    | 1/10 <sup>4</sup> (1/2) <sup>4</sup> |
| 1    | 0    | 1    | 1/5            | 1    | 0    | 1    | 1/10 <sup>5</sup> (1/2) <sup>5</sup> |
| 1    | 1    | 0    | 1/6            | 1    | 1    | 0    | 1/10 <sup>6</sup> (1/2) <sup>6</sup> |
| 1    | 1    | 1    | 1/12           | 1    | 1    | 1    | 1/10 <sup>7</sup> (1/2) <sup>7</sup> |

0= "L" 1="H"

( )8650D

### Setting of output frequency

#### 8640AN

(Unit: Hz)

| Set terminal |   | CTL4 | CTL5 | CTL6 | CTL3 | CTL2 | CTL1 | Output frequency | Baud rate output example (to/16) |
|--------------|---|------|------|------|------|------|------|------------------|----------------------------------|
|              |   | 0    | 0    | 0    | 0    | 1    | 1    | 1                | 1                                |
|              |   | 0    | 0    | 1    | 1    | 0    | 0    | 1                | 1                                |
|              |   | 0    | 1    | 0    | 1    | 0    | 1    | 0                | 1                                |
| 0            | 0 | 0    | 600K | 60K  | 6K   | 600  | 60   | 6.0              | 0.06                             |
| 0            | 0 | 1    | 60K  | 6K   | 600  | 60   | 6    | 0.6              | 0.06                             |
| 0            | 1 | 0    | 300K | 30K  | 3K   | 300  | 30   | 3.0              | 0.3                              |
| 0            | 1 | 1    | 200K | 20K  | 2K   | 200  | 20   | 2.0              | 0.2                              |
| 1            | 0 | 0    | 150K | 15K  | 1.5K | 150  | 15   | 1.5              | 0.15                             |
| 1            | 0 | 1    | 120K | 12K  | 1.2K | 120  | 12   | 1.2              | 0.12                             |
| 1            | 1 | 0    | 100K | 10K  | 1K   | 100  | 10   | 1.0              | 0.1                              |
| 1            | 1 | 1    | 50K  | 5K   | 500  | 50   | 5    | 0.5              | 0.05                             |

#### 8640BN

| Set terminal |   | CTL4 | CTL5   | CTL6  | CTL3  | CTL2  | CTL1 | Output frequency | Baud rate output example (to/16) |
|--------------|---|------|--------|-------|-------|-------|------|------------------|----------------------------------|
|              |   | 0    | 0      | 0     | 0     | 1     | 1    | 1                | 1                                |
|              |   | 0    | 0      | 1     | 1     | 0     | 0    | 1                | 1                                |
|              |   | 0    | 1      | 0     | 1     | 0     | 1    | 0                | 1                                |
| 0            | 0 | 0    | 1M     | 100K  | 10K   | 1K    | 100  | 10               | 1/10                             |
| 0            | 0 | 1    | 100K   | 10K   | 1K    | 100   | 10   | 1                | 1/100                            |
| 0            | 1 | 0    | 500K   | 50K   | 5K    | 500   | 50   | 5                | 1/20                             |
| 0            | 1 | 1    | 333.3K | 33.3K | 3.3K  | 333.3 | 33.3 | 3.33             | 1/30                             |
| 1            | 0 | 0    | 250K   | 25K   | 2.5K  | 250   | 25   | 2.5              | 1/40                             |
| 1            | 0 | 1    | 200K   | 20K   | 2K    | 200   | 20   | 2                | 1/50                             |
| 1            | 1 | 0    | 166.6K | 16.6K | 1.6K  | 166.6 | 16.6 | 1.6              | 1/60                             |
| 1            | 1 | 1    | 83.3K  | 8.3K  | 833.3 | 83.3  | 8.3  | 0.83             | 1/120                            |

#### 8650A 8651A

| Set terminal |   | CTL4 | CTL5 | CTL6 | CTL3 | CTL2 | CTL1 | Output frequency | Baud rate output example (to/16) |
|--------------|---|------|------|------|------|------|------|------------------|----------------------------------|
|              |   | 0    | 0    | 0    | 0    | 1    | 1    | 1                | 1                                |
|              |   | 0    | 0    | 1    | 1    | 0    | 0    | 1                | 1                                |
|              |   | 0    | 1    | 0    | 1    | 0    | 1    | 0                | 1                                |
| 0            | 0 | 0    | 60K  | 6.0K | 600  | 60   | 6.0  | 0.6              | 0.06                             |
| 0            | 0 | 1    | 6K   | 600  | 60   | 6    | 0.6  | 0.06             | 0.006                            |
| 0            | 1 | 0    | 30K  | 3.0K | 300  | 30   | 3.0  | 0.3              | 0.03                             |
| 0            | 1 | 1    | 20K  | 2.0K | 200  | 20   | 2.0  | 0.2              | 0.02                             |
| 1            | 0 | 0    | 15K  | 1.5K | 150  | 15   | 1.5  | 0.15             | 0.015                            |
| 1            | 0 | 1    | 12K  | 1.2K | 120  | 12   | 1.2  | 0.12             | 0.012                            |
| 1            | 1 | 0    | 10K  | 1.0K | 100  | 10   | 1.0  | 0.1              | 0.01                             |
| 1            | 1 | 1    | 5K   | 500  | 50   | 5    | 0.5  | 0.05             | 0.005                            |

#### 8650B 8651B

| Set terminal |   | CTL4 | CTL5  | CTL6  | CTL3  | CTL2 | CTL1 | Output frequency | Baud rate output example (to/16) |
|--------------|---|------|-------|-------|-------|------|------|------------------|----------------------------------|
|              |   | 0    | 0     | 0     | 0     | 1    | 1    | 1                | 1                                |
|              |   | 0    | 0     | 1     | 1     | 0    | 0    | 1                | 1                                |
|              |   | 0    | 1     | 0     | 1     | 0    | 1    | 0                | 1                                |
| 0            | 0 | 0    | 100K  | 10K   | 1K    | 100  | 10   | 1                | 1/10                             |
| 0            | 0 | 1    | 10K   | 1K    | 100   | 10   | 1    | 1/10             | 1/1000                           |
| 0            | 1 | 0    | 50K   | 5K    | 500   | 50   | 5    | 1/2              | 1/200                            |
| 0            | 1 | 1    | 33.3K | 3.3K  | 333.3 | 33.3 | 3.33 | 1/3              | 1/300                            |
| 1            | 0 | 0    | 25K   | 2.5K  | 250   | 25   | 2.5  | 1/4              | 1/400                            |
| 1            | 0 | 1    | 20K   | 2K    | 200   | 20   | 2    | 1/5              | 1/500                            |
| 1            | 1 | 0    | 16.6K | 1.6K  | 166.6 | 16.6 | 1.6  | 1/6              | 1/600                            |
| 1            | 1 | 1    | 8.3K  | 833.3 | 83.3  | 8.3  | 0.83 | 1/12             | 1/1200                           |

#### 8650E 8651E

| Set terminal |   | CTL4 | CTL5    | CTL6    | CTL3    | CTL2   | CTL1  | Output frequency | Baud rate output example (to/16) |
|--------------|---|------|---------|---------|---------|--------|-------|------------------|----------------------------------|
|              |   | 0    | 0       | 0       | 0       | 1      | 1     | 1                | 1                                |
|              |   | 0    | 0       | 1       | 1       | 0      | 0     | 1                | 1                                |
|              |   | 0    | 1       | 0       | 1       | 0      | 1     | 0                | 1                                |
| 0            | 0 | 0    | 32768   | 3276.8  | 327.68  | 32.768 | 3.276 | 0.3276           | 0.03276                          |
| 0            | 0 | 1    | 3276.8  | 327.68  | 32.768  | 3.276  | 0.327 | 0.0327           | 0.00327                          |
| 0            | 1 | 0    | 16384   | 1638.4  | 163.84  | 16.384 | 1.638 | 0.1638           | 0.01638                          |
| 0            | 1 | 1    | 10922.6 | 1092.26 | 109.226 | 10.922 | 1.092 | 0.1092           | 0.01092                          |
| 1            | 0 | 0    | 8192    | 819.2   | 81.92   | 8.192  | 0.819 | 0.0819           | 0.00819                          |
| 1            | 0 | 1    | 6553.6  | 655.36  | 65.536  | 6.553  | 0.655 | 0.0655           | 0.00655                          |
| 1            | 1 | 0    | 5461.3  | 546.13  | 54.613  | 5.461  | 0.546 | 0.0546           | 0.00546                          |
| 1            | 1 | 1    | 2730.6  | 273.06  | 27.306  | 2.730  | 0.273 | 0.0273           | 0.00273                          |

Note: Lower digits are omitted.

### Baud rate generator

#### 8640CN

| CTL1 | CTL2 | CTL3 | CTL4 | CTL5 | CTL6 | Output frequency | Baud rate output example (to/16) |
|------|------|------|------|------|------|------------------|----------------------------------|
| 0    | 0    | 0    | 0    | 0    | 0    | 768 kHz          | 48000bits/sec.                   |
| 1    | 0    | 1    | 0    | 0    | 0    | 153.6            | 9600                             |
| 0    | 0    | 1    | 0    | 0    | 0    | 76.8             | 4800                             |
| 0    | 1    | 0    | 0    | 0    | 1    | 38.4             | 2400                             |
| 1    | 0    | 0    | 0    | 0    | 1    | 19.2             | 1200                             |

#### 8650C

| CTL1 | CTL2 | CTL3 | CTL4 | CTL5 | CTL6 | Output frequency | Baud rate output example (to/16) |
|------|------|------|------|------|------|------------------|----------------------------------|
| 0    | 0    | 0    | 0    | 0    | 0    | 96.0 kHz         | 6000bits/sec.                    |
| 1    | 0    | 1    | 0    | 0    | 0    | 19.2             | 1200                             |
| 0    | 0    | 1    | 0    | 0    | 0    | 9.6              | 600                              |
| 0    | 1    | 0    | 0    | 0    | 1    | 4.8              | 300                              |
| 0    | 1    | 1    | 0    | 0    | 1    | 3.2              | 200                              |
| 1    | 0    | 0    | 0    | 0    | 1    | 2.4              | 150                              |
| 1    | 1    | 0    | 0    | 0    | 1    | 1.6              | 100                              |
| 1    | 1    | 1    | 0    | 0    | 1    | 0.8              | 50                               |

#### 8650D

| CTL1 | CTL2 | CTL3 | CTL4 | CTL5 | CTL6 | Output frequency | Baud rate output example (to/16) |
|------|------|------|------|------|------|------------------|----------------------------------|
| 0    | 0    | 0    | 0    | 0    | 0    | 153.6 kHz        | 9600bits/sec.                    |
| 0    | 0    | 0    | 0    | 0    | 1    | 76.8             | 4800                             |
| 0    | 0    | 0    | 0    | 1    | 0    | 38.4             | 2400                             |
| 0    | 0    | 0    | 0    | 1    | 1    | 19.2             | 1200                             |
| 0    | 0    | 0    | 1    | 0    | 0    | 9.6              | 600                              |
| 0    | 0    | 0    | 1    | 0    | 1    | 4.8              | 300                              |
| 0    | 1    | 1    | 1    | 0    | 0    | 3.2              | 200                              |
| 0    | 0    | 0    | 1    | 1    | 0    | 2.4              | 150                              |
| 1    | 1    | 0    | 1    | 0    | 0    | 1.6              | 100                              |
| 0    | 0    | 0    | 1    | 1    | 1    | 1.2              | 75                               |
| 1    | 1    | 1    | 1    | 0    | 0    | 0.8              | 50                               |