

DATA SHEET

BFG591

NPN 7 GHz wideband transistor

Product specification
Supersedes data of November 1992
File under Discrete Semiconductors, SC14

1995 Sep 04

NPN 7 GHz wideband transistor

BFG591

FEATURES

- High power gain
- Low noise figure
- High transition frequency
- Gold metallization ensures excellent reliability.

APPLICATIONS


Intended for applications in the GHz range such as MATV or CATV amplifiers and RF communications subscriber equipment.

DESCRIPTION

NPN silicon planar epitaxial transistor in a plastic, 4-pin SOT223 package.

PINNING

| PIN | DESCRIPTION |
|-----|-------------|
| 1 | emitter |
| 2 | base |
| 3 | emitter |
| 4 | collector |

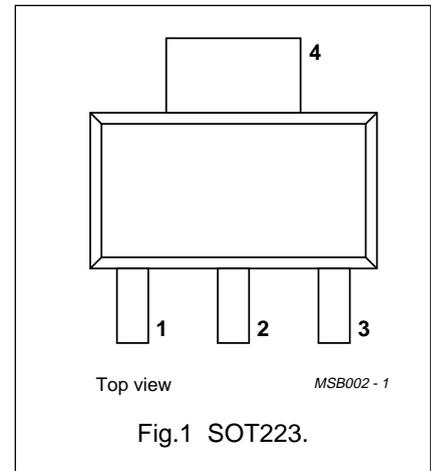

QUICK REFERENCE DATA

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|--------------|-------------------------------|---|------|------|------|------|
| V_{CBO} | collector-base voltage | open emitter | – | – | 20 | V |
| V_{CEO} | collector-emitter voltage | open base | – | – | 15 | V |
| I_C | collector current (DC) | | – | – | 200 | mA |
| P_{tot} | total power dissipation | up to $T_s = 80\text{ °C}$; note 1 | – | – | 2 | W |
| h_{FE} | DC current gain | $I_C = 70\text{ mA}$; $V_{CE} = 8\text{ V}$ | 60 | 90 | 250 | |
| C_{re} | feedback capacitance | $I_C = I_c = 0$; $V_{CE} = 12\text{ V}$; $f = 1\text{ MHz}$ | – | 0.7 | – | pF |
| f_T | transition frequency | $I_C = 70\text{ mA}$; $V_{CE} = 12\text{ V}$; $f = 1\text{ GHz}$ | – | 7 | – | GHz |
| G_{UM} | maximum unilateral power gain | $I_C = 70\text{ mA}$; $V_{CE} = 12\text{ V}$; $f = 900\text{ MHz}$; $T_{amb} = 25\text{ °C}$ | – | 13 | – | dB |
| $ S_{21} ^2$ | insertion power gain | $I_C = 70\text{ mA}$; $V_{CE} = 12\text{ V}$; $f = 900\text{ MHz}$; $T_{amb} = 25\text{ °C}$ | – | 12 | – | dB |

Note

1. T_s is the temperature at the soldering point of the collector pin.

NPN 7 GHz wideband transistor

BFG591

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

| SYMBOL | PARAMETER | CONDITIONS | MIN. | MAX. | UNIT |
|-----------|---------------------------|-------------------------------------|------|------|------|
| V_{CBO} | collector-base voltage | open emitter | – | 20 | V |
| V_{CEO} | collector-emitter voltage | open base | – | 15 | V |
| V_{EBO} | emitter-base voltage | open collector | – | 3 | V |
| I_C | collector current (DC) | | – | 200 | mA |
| P_{tot} | total power dissipation | up to $T_s = 80\text{ °C}$; note 1 | – | 2 | W |
| T_{stg} | storage temperature | | –65 | +150 | °C |
| T_j | junction temperature | | – | 150 | °C |

THERMAL CHARACTERISTICS

| SYMBOL | PARAMETER | CONDITIONS | VALUE | UNIT |
|---------------|---|------------|-------|------|
| $R_{th\ j-s}$ | thermal resistance from junction to soldering point | note 1 | 35 | K/W |

Note to the Limiting values and Thermal characteristics

- T_s is the temperature at the soldering point of the collector pin.

NPN 7 GHz wideband transistor

BFG591

CHARACTERISTICS

$T_j = 25\text{ °C}$ (unless otherwise specified).





| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|---------------|--|---|------|------|------|------|
| $V_{(BR)CBO}$ | collector-base breakdown voltage | $I_C = 0.1\text{ mA}; I_E = 0$ | – | – | 20 | V |
| $V_{(BR)CES}$ | collector-emitter breakdown voltage | $I_C = 10\text{ mA}; I_B = 0$ | – | – | 15 | V |
| $V_{(BR)EBO}$ | emitter-base breakdown voltage | $I_E = 0.1\text{ mA}; I_C = 0$ | – | – | 3 | V |
| I_{CBO} | collector-base leakage current | $I_E = 0; V_{CB} = 10\text{ V}$ | – | – | 100 | nA |
| h_{FE} | DC current gain | $I_C = 70\text{ mA}; V_{CE} = 8\text{ V}$ | 60 | 90 | 250 | |
| C_{re} | feedback capacitance | $I_B = I_b = 0; V_{CE} = 12\text{ V};$ $f = 1\text{ MHz}$ | – | 0.7 | – | pF |
| f_T | transition frequency | $I_C = 70\text{ mA}; V_{CE} = 12\text{ V};$ $f = 1\text{ GHz}$ | – | 7 | – | GHz |
| G_{UM} | maximum unilateral power gain; note 1 | $I_C = 70\text{ mA}; V_{CE} = 12\text{ V};$ $f = 900\text{ MHz}; T_{amb} = 25\text{ °C}$ | – | 13 | – | dB |
| | | $I_C = 70\text{ mA}; V_{CE} = 12\text{ V};$ $f = 2\text{ GHz}; T_{amb} = 25\text{ °C}$ | – | 7.5 | – | dB |
| $ S_{21} ^2$ | insertion power gain | $I_C = 70\text{ mA}; V_{CE} = 12\text{ V};$ $f = 1\text{ GHz}; T_{amb} = 25\text{ °C}$ | – | 12 | – | dB |
| V_o | output voltage | note 2 | – | 700 | – | mV |

Notes

- G_{UM} is the maximum unilateral power gain, assuming s_{12} is zero. $G_{UM} = 10 \log \frac{|S_{21}|^2}{(1 - |S_{11}|^2)(1 - |S_{22}|^2)}$ dB.
- $d_{im} = 60\text{ dB}$ (DIN45004B);
 $V_p = V_o; V_q = V_o - 6\text{ dB}; V_r = V_o - 6\text{ dB};$
 $f_p = 795.25\text{ MHz}; f_q = 803.25\text{ MHz}; f_r = 803.25\text{ MHz};$ measured at $f_{(p+q-r)} = 793.25\text{ MHz}.$




NPN 7 GHz wideband transistor

BFG591

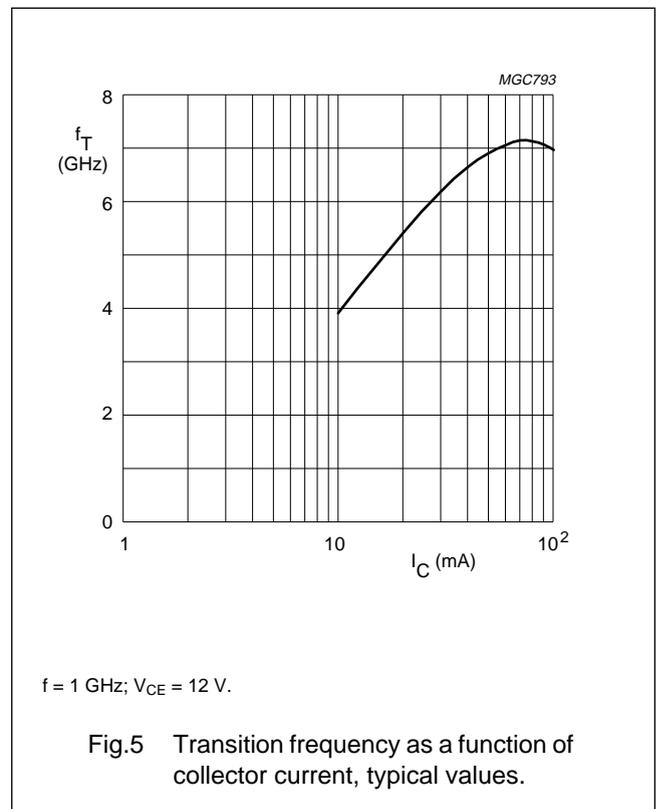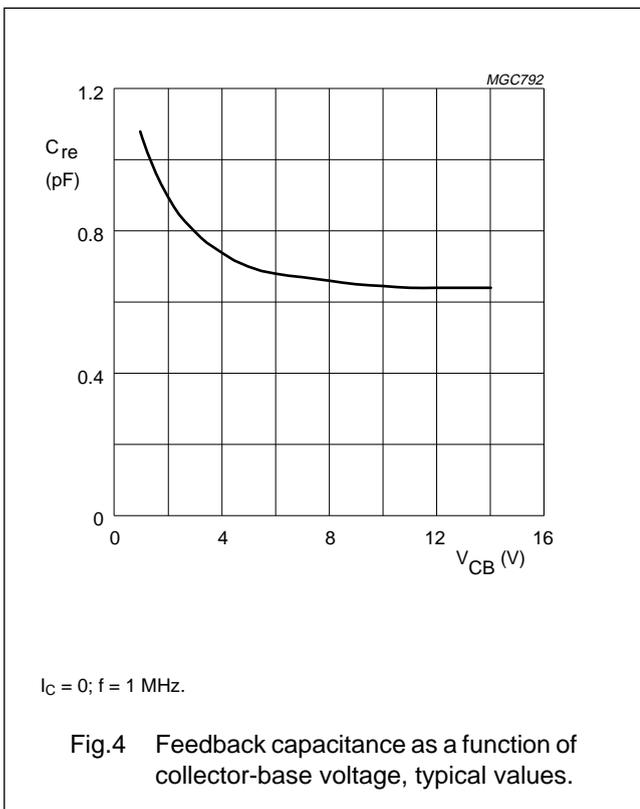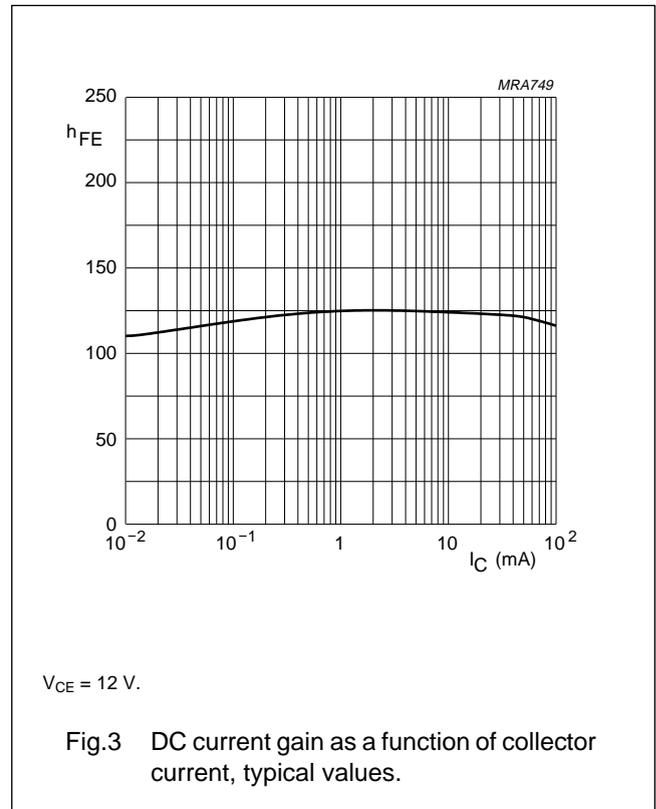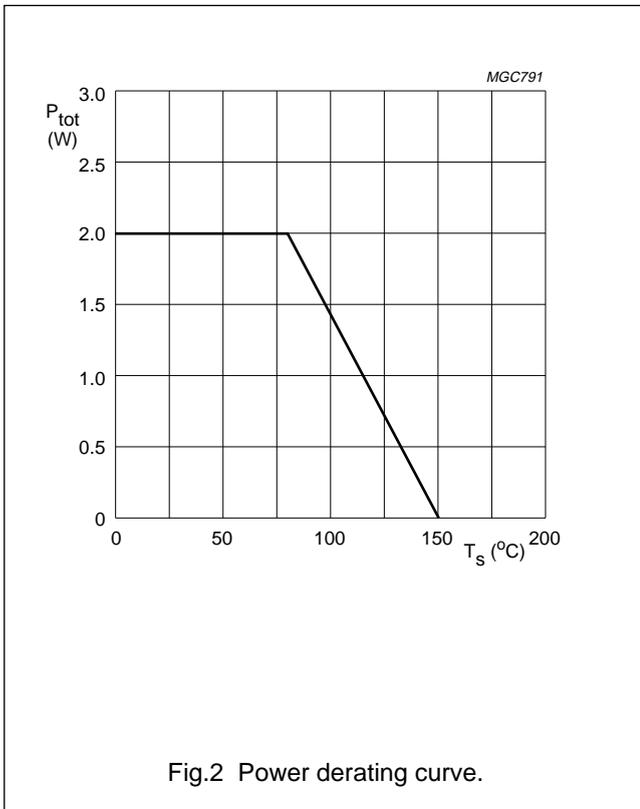



NPN 7 GHz wideband transistor

BFG591

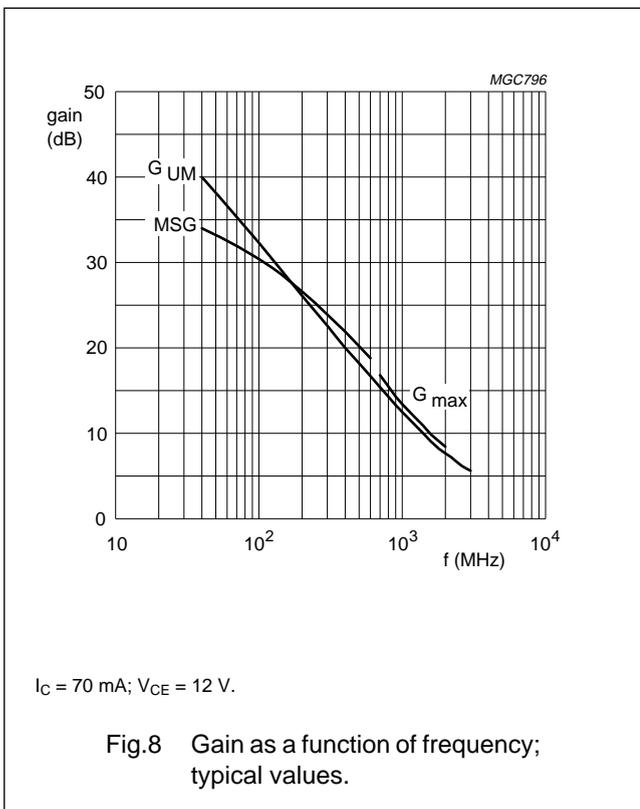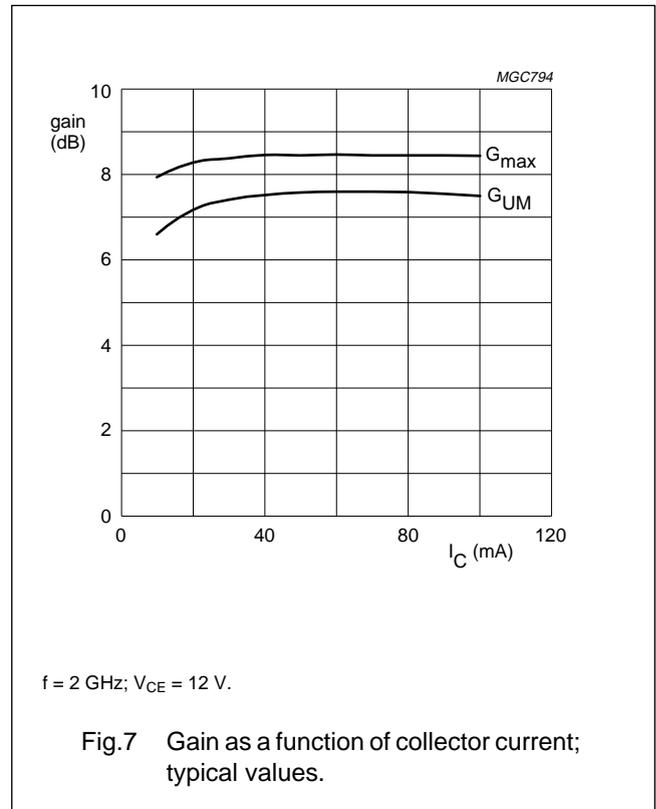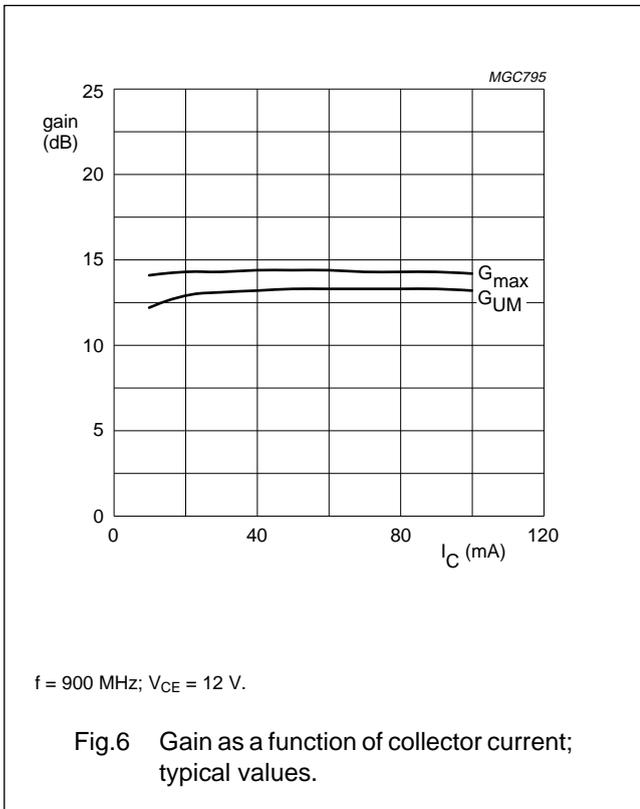


NPN 7 GHz wideband transistor

BFG591

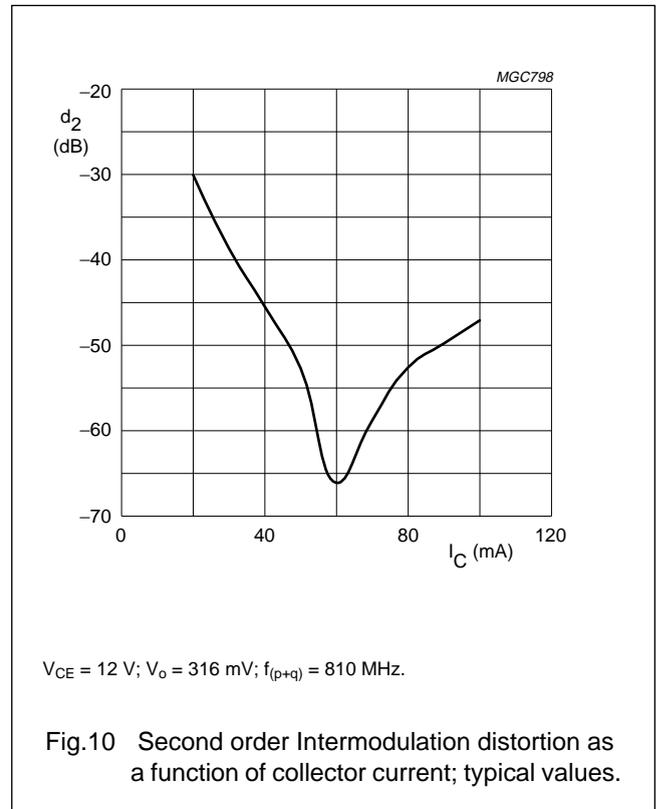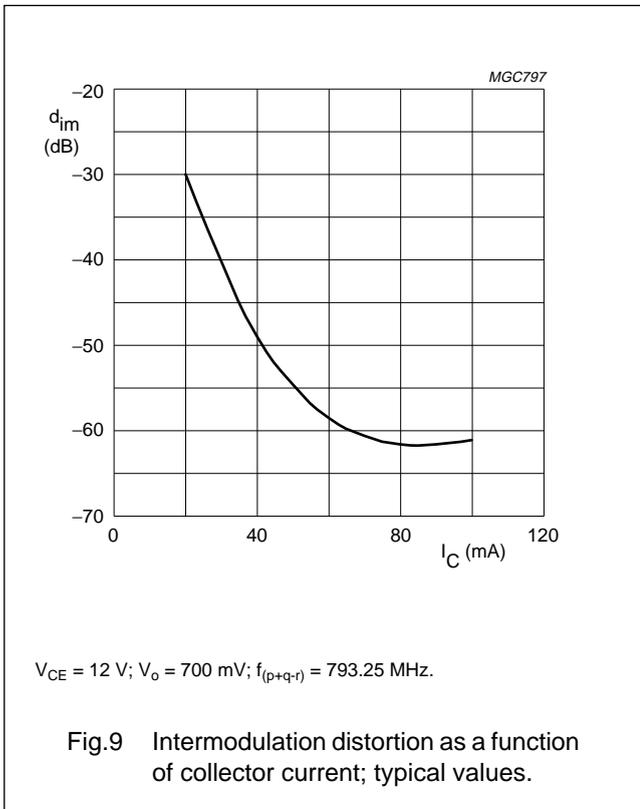


NPN 7 GHz wideband transistor

BFG591

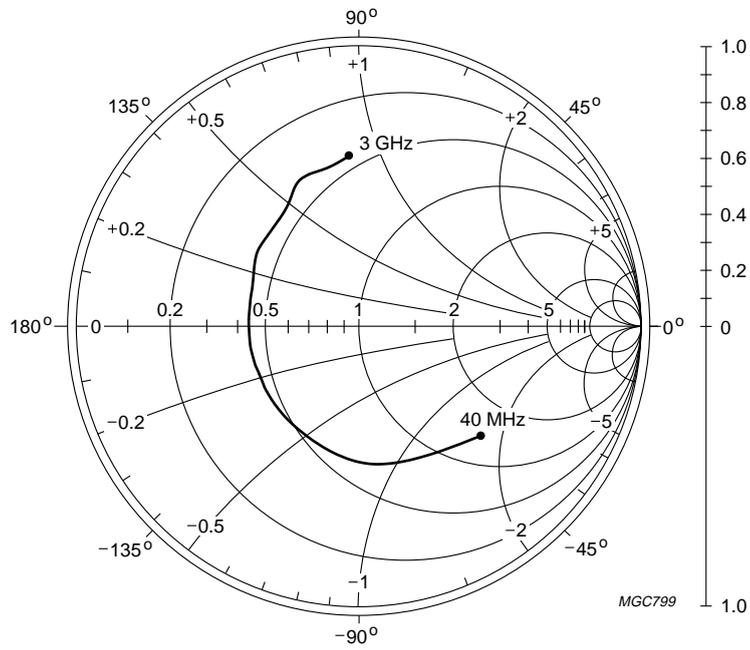

$V_{CE} = 12\text{ V}; I_C = 70\text{ mA}; Z_o = 50\ \Omega.$

Fig.11 Common emitter input reflection coefficient (s_{11}); typical values.

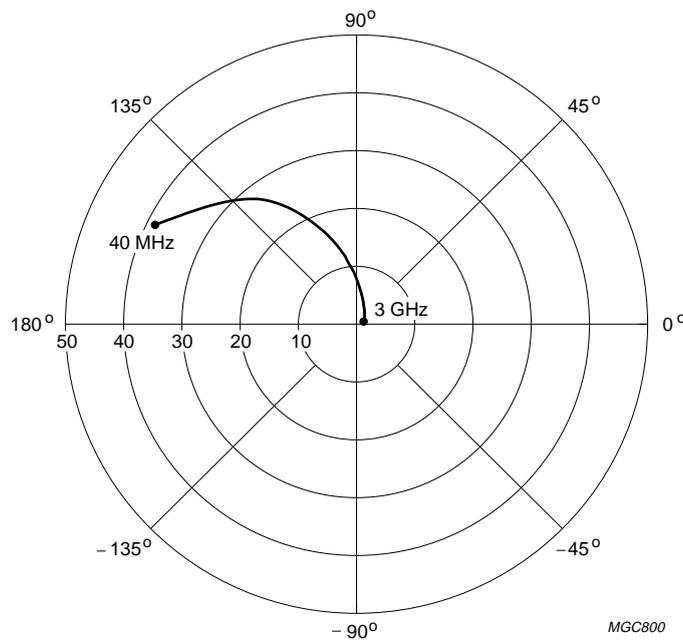


$V_{CE} = 12\text{ V}; I_C = 70\text{ mA}.$

Fig.12 Common emitter forward transmission coefficient (s_{21}); typical values.


NPN 7 GHz wideband transistor

BFG591

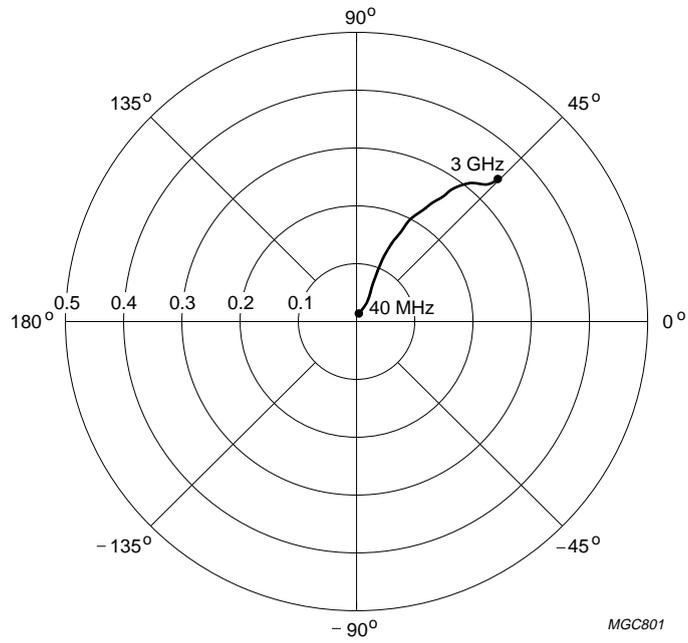

$V_{CE} = 12\text{ V}; I_C = 70\text{ mA}$.

Fig.13 Common emitter reverse transmission coefficient (s_{12}); typical values.

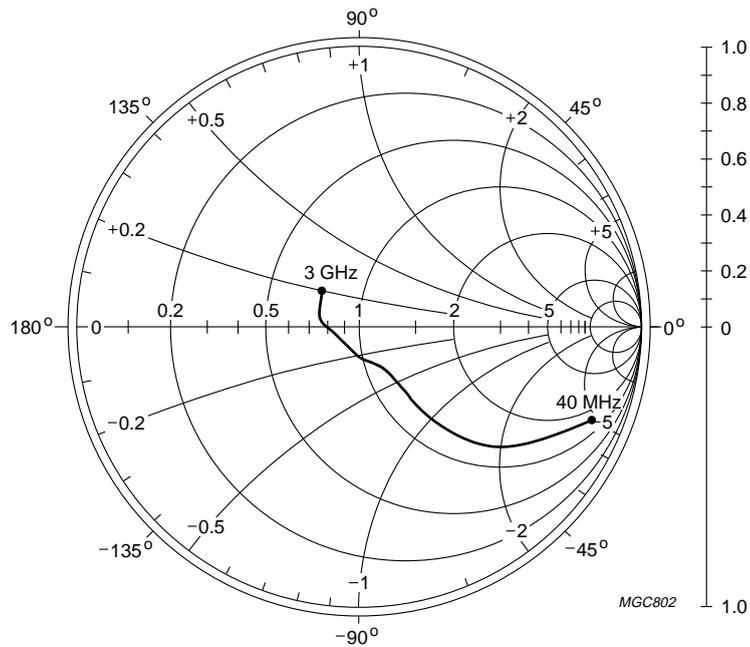

$V_{CE} = 12\text{ V}; I_C = 70\text{ mA}; Z_0 = 50\ \Omega$.

Fig.14 Common emitter output reflection coefficient (s_{22}); typical values.

NPN 7 GHz wideband transistor

BFG591

SPICE parameters for the BFG591 crystal

| SEQUENCE No. | PARAMETER | VALUE | UNIT |
|--------------|-----------|-------|------------|
| 1 | IS | 1.341 | fA |
| 2 | BF | 123.5 | – |
| 3 | NF | .988 | m |
| 4 | VAF | 75.85 | V |
| 5 | IKF | 9.656 | A |
| 6 | ISE | 232.2 | fA |
| 7 | NE | 2.134 | – |
| 8 | BR | 10.22 | – |
| 9 | NR | 1.016 | – |
| 10 | VAR | 1.992 | V |
| 11 | IKR | 294.1 | mA |
| 12 | ISC | 211.0 | aA |
| 13 | NC | 997.2 | – |
| 14 | RB | 5.00 | Ω |
| 15 | IRB | 1.000 | μ A |
| 16 | RBM | 5.00 | Ω |
| 17 | RE | 1.275 | Ω |
| 18 | RC | 920.6 | m Ω |
| 19 (1) | XTB | 0.000 | – |
| 20 (1) | EG | 1.110 | EV |
| 21 (1) | XTI | 3.000 | – |
| 22 | CJE | 3.821 | pF |
| 23 | VJE | 600.0 | mV |
| 24 | MJE | 348.5 | m |
| 25 | TF | 13.60 | ps |
| 26 | XTF | 71.73 | – |
| 27 | VTF | 10.28 | V |
| 28 | ITF | 1.929 | A |
| 29 | PTF | 0.000 | deg |
| 30 | CJC | 1.409 | pF |
| 31 | VJC | 219.4 | mV |
| 32 | MJC | 166.5 | m |
| 33 | XCJ | 2.340 | m |
| 34 | TR | 543.7 | ns |
| 35 (1) | CJS | 0.000 | F |
| 36 (1) | VJS | 750.0 | mV |
| 37 (1) | MJS | 0.000 | – |
| 38 | FC | 733.2 | m |

Note

1. These parameters have not been extracted, the default values are shown.

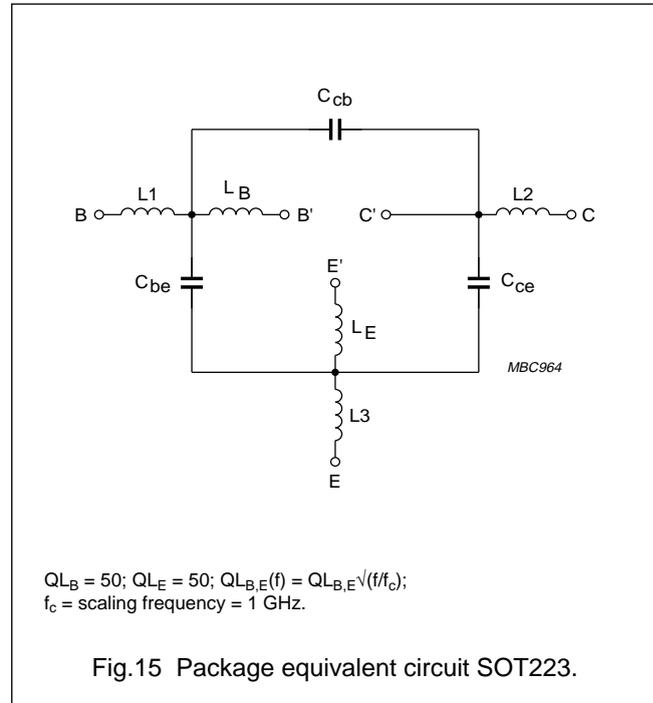


Fig.15 Package equivalent circuit SOT223.

List of components (see Fig.15)

| DESIGNATION | VALUE | UNIT |
|-------------|-------|------|
| C_{be} | 182 | fF |
| C_{cb} | 16 | fF |
| C_{ce} | 249 | fF |
| L1 | 0.025 | nH |
| L2 | 1.19 | nH |
| L3 | 0.60 | nH |
| L_B | 1.50 | nH |
| L_E | 0.50 | nH |

NPN 7 GHz wideband transistor

BFG591

DEFINITIONS

| Data Sheet Status | |
|---|---|
| Objective specification | This data sheet contains target or goal specifications for product development. |
| Preliminary specification | This data sheet contains preliminary data; supplementary data may be published later. |
| Product specification | This data sheet contains final product specifications. |
| Limiting values | |
| Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability. | |
| Application information | |
| Where application information is given, it is advisory and does not form part of the specification. | |

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.