Tyco/Electronics Raychem Circuit Protection

308 Constitution Drive Menlo Park. CA 94025-1164 800-227-4856

FAX 800-227-4866

### **PolySwitch® PTC Devices**

**Overcurrent Protection Device** 

PRODUCT: LVR016S

DOCUMENT: SCD 24905

PCN: 224962 **REV LETTER: F** 

**REV DATE: JUNE 19, 2003** 

PAGE NO.: 1 OF 2

## **Specification Status: RELEASED**

#### Electrical Rating at 20°C

Rated Operating Voltage: 240 V<sub>AC</sub> **Rated Interrupt Current: 2.0A** 


Max Interrupt Voltage: 265 V<sub>AC</sub>


Insulating Material:


Cured, Flame Retardant Epoxy Polymer

Meets UL94 V-0 Requirements.

Lead Material: 24 AWG Sn Plated Copper





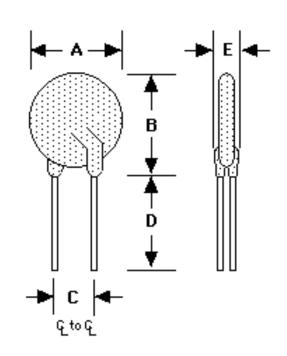

#### **TABLE I. DIMENSIONS:**

	Α		В		С		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:		9.9		12.5	4.3	5.8	7.6			3.8
in*:		(0.39)		(0.50)	(0.17)	(0.23)	(0.30)			(0.15)

<sup>\*</sup>Rounded off approximation

#### TABLE II. PERFORMANCE RATINGS:

ABLE II. I EN ONMANDE NATINGO.											
	I <sub>HOLD</sub> RATED CURRENT	CURRENT RATINGS		TIME TO TRIP	RIP RESISTANCE		POST-TRIP RESISTANCE STANDARD TRIP	NOMINAL TRIPPED POWER DISSIPATION			
	AMPS AT 20°C HOLD	AMPS AT 20°C HOLD   TRIP		SECONDS AT 20°C, 0.8A MAX	OHMS AT 20°C MIN   MAX		OHMS AT 20°C MAX	WATTS AT 20°C			
	0.16	0.16	0.37	15.0	2.5	4.1	7.8	1.4			

Recognitions: UL, TUV, CSA recognized.

Reference Documents:

Precedence: This specification takes precedence over documents referenced herein.

Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

Warning: Refer to Page 2 of this document for application limitations. **Tyco/Electronics Raychem Circuit Protection**308 Constitution Drive
Menlo Park, CA 94025-1164
800-227-4856

# PolySwitch® PTC Devices

**Overcurrent Protection Device** 

PRODUCT: LVR016S

DOCUMENT: SCD 24905 PCN: 224962

REV LETTER: F

**REV DATE: JUNE 19, 2003** 

PAGE NO.: 2 OF 2



FAX 800-227-4866

#### Warning: Application Limitations for LVR Product Line

- 1. Users should independently evaluate the suitability of and test each product selected for their own application.
- This product should not be used in an application where maximum interrupt voltage or maximum interrupt current can be exceeded in a fault condition. Operation beyond the maximum ratings or improper use may result in device damage and possible electrical arcing and flame.
- 3. A PTC device is not a fuse it is a nonlinear thermistor that limits current. Because under a fault condition all PTC devices go into a high resistance state but not open circuit, hazardous voltage may be present at PTC locations.
- 4. The devices are intended for protection against occasional overcurrent or overtemperature fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated.
- 5. In most applications, power must be removed and the fault condition cleared in order to reset a PTC device. However, under certain unusual conditions, a PTC device may automatically reset (see Raychem Circuit Protection Databook). Accordingly, PTC devices should not be used in an application where an automatic reset could create a safety hazard, such as garbage disposals and blenders.
- 6. It is the responsibility of the user to determine the need for back up or fail safe protection to prevent damage that may occur in the event of abnormal function or failure of the PTC device.
- 7. Operation in circuits with a large inductance can generate a circuit voltage (Ldi/dt) above the rated voltage of a PTC device.
- 8. Devices are not recommended for reflow soldering.
- 9. Device performance can be impacted negatively if devices are handled in a manner inconsistent with recommended electronic, thermal, or mechanical procedures for electronic components.
- 10. PTC devices are not recommended to be installed in applications where the device is constrained such that its PTC properties are inhibited, for example in rigid potting materials or in rigid housings which lack adequate clearance to accommodate device expansion.
- 11. Contamination of the PTC material with certain silicone-based oils or some aggressive solvents can adversely impact the performance of the devices.