



1 watt dc-dc converters

- 8PIN DIP PACKAGE
- LOW RIPPLE & NOISE
- HIGH EFFICIENCY UP TO 80%
- INPUT/OUTPUT ISOLATION: 1000 & 3000VDC
- OPERATING TEMPERATURE: -40 °C ... +85 °C
- PIN-COMPATIBLE WITH MULTIPLE MANUFACTURERS

GENERAL DESCRIPTION

The AM1P series is a family of cost effective 1W single, dual, dual separate output isolated DC-DC converters. These converters achieve low cost and ultra-miniature DIP8 pin size without compromising performance and reliability.

Ninety six models operate from input voltages of 5, 12 & 24 VDC; producing output voltage levels of 3.3, 5, 7.2, 9, 12, 15, 18, 24, ± 3.3 , ± 5 , ± 7.2 , ± 9 , ± 12 , ± 15 , ± 18 , ± 24 . Full SMD-design and 100 % production test of parameters ensures a high reliability in this product.

ELECTRICAL SPECIFICATIONS


Specifications typical at +25°C, nominal input voltage, rated output current unless otherwise specified

Input Specifications:		General Specifications:	
Voltage range	$\pm 10\%$	Efficiency	71% to 80%
Filter	Capacitor	Switching frequency	80KHz, typ.
Isolation Specifications:		Environmental Specifications:	
Rated voltage (60 sec)	1000VDC (all models) 3000VDC (single output)	Operating temperature (ambient)	-40 °C ... +85 °C
Resistance	> 1000MOhm	Storage temperature	-55 °C ... +125 °C
Capacitance	60pF, typ.	Derating	None required
		Humidity (non-condensing)	Up to 90%
		Cooling	Free-air Convection
Output Specifications:		Physical Specifications:	
Voltage accuracy	$\pm 5\%$, max	Dimensions	12.7x10.16x6.85mm
Ripple & noise (at 20MHz BW)	100 mVp-p, max		0.50x0.4x0.27inches
Short circuit protection	Momentary	Weight	1.8g
Line voltage regulation	$\pm 1.2\%$ / 1.0% of Vin	Case material	Non-conductive black plastic
Load voltage regulation	$\pm 8\%$, load=20~100%		
Temperature coefficient	$\pm 0.02\%$ / °C		

MTBF: >1191000 hrs (MIL-HDBK-217F, Ground Benign, t=+25 °C)

Specifications are subject to change without notification

OUTLINE DIMENSIONS & PIN CONNECTIONS

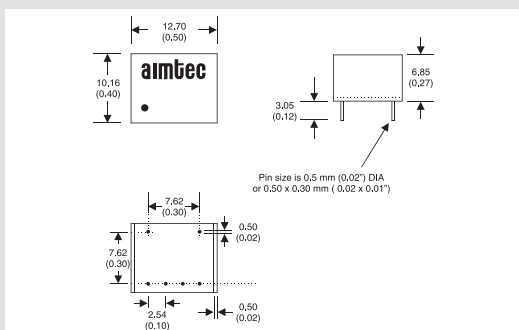

Pin	1000 & 3000 VDC		1000VDC
	Single	Dual	Dual Separate
1	-V Input	-V Input	-V Input
4	+V Input	+V Input	+V Input
5	+V Output	+V Output	+V1 Output
6	Omitted	Omitted	-V1 Output
7	-V Output	Common	+V2 Output
8	Omitted	-V Output	-V2 Output

Continued on next page

MODELS

Single output

Models		Input Voltage	Ouput Voltage	Ouput Current max.
Isolation 1000VDC	Isolation 3000VDC			
AM1P-0503S	AM1P-0503SH30	5V±10%	3.3VDC	300mA
AM1P-0505S	AM1P-0505SH30		5VDC	200mA
AM1P-0507S	AM1P-0507SH30		7.2VDC	140mA
AM1P-0509S	AM1P-0509SH30		9VDC	110mA
AM1P-0512S	AM1P-0512SH30		12VDC	83mA
AM1P-0515S	AM1P-0515SH30		15VDC	67mA
AM1P-0518S	AM1P-0518SH30		18VDC	56mA
AM1P-0524S	AM1P-0524SH30		24VDC	42mA
AM1P-1203S	AM1P-1203SH30	12V±10%	3.3VDC	300mA
AM1P-1205S	AM1P-1205SH30		5VDC	200mA
AM1P-1207S	AM1P-1207SH30		7.2VDC	140mA
AM1P-1209S	AM1P-1209SH30		9VDC	110mA
AM1P-1212S	AM1P-1212SH30		12VDC	83mA
AM1P-1215S	AM1P-1215SH30		15VDC	67mA
AM1P-1218S	AM1P-1218SH30		18VDC	56mA
AM1P-1224S	AM1P-1224SH30		24VDC	42mA
AM1P-2403S	AM1P-2403SH30	24V±10%	3.3VDC	300mA
AM1P-2405S	AM1P-2405SH30		5VDC	200mA
AM1P-2407S	AM1P-2407SH30		7.2VDC	140mA
AM1P-2409S	AM1P-2409SH30		9VDC	110mA
AM1P-2412S	AM1P-2412SH30		12VDC	83mA
AM1P-2415S	AM1P-2415SH30		15VDC	67mA
AM1P-2418S	AM1P-2418SH30		18VDC	56mA
AM1P-2424S	AM1P-2424SH30		24VDC	42mA

Dual output

Models		Input Voltage	Ouput Voltage	Ouput Current max.
Isolation 1000VDC				
AM1P-0503D	5V±10%	5V±10%	±3.3VDC	±150mA
AM1P-0505D			±5VDC	±100mA
AM1P-0507D			±7.2VDC	±70mA
AM1P-0509D			±9VDC	±55mA
AM1P-0512D			±12VDC	±42mA
AM1P-0515D			±15VDC	±34mA
AM1P-0518D			±18VDC	±28mA
AM1P-0524D			±24VDC	±21mA
AM1P-1203D	12V±10%	12V±10%	±3.3VDC	±150mA
AM1P-1205D			±5VDC	±100mA
AM1P-1207D			±7.2VDC	±70mA
AM1P-1209D			±9VDC	±55mA
AM1P-1212D			±12VDC	±42mA
AM1P-1215D			±15VDC	±34mA
AM1P-1218D			±18VDC	±28mA
AM1P-1224D			±24VDC	±21mA

MODELS

Dual output (continued)

Models	Input Voltage	Ouput Voltage	Ouput Current max.
AM1P-2403D	24V±10%	±3.3VDC	±150mA
AM1P-2405D		±5VDC	±100mA
AM1P-2407D		±7.2VDC	±70mA
AM1P-2409D		±9VDC	±55mA
AM1P-2412D		±12VDC	±42mA
AM1P-2415D		±15VDC	±34mA
AM1P-2418D		±18VDC	±28mA
AM1P-2424D		±24VDC	±21mA

Dual separate output

Models	Input Voltage	Ouput Voltage	Ouput Current max.
Isolation 1000VDC			
AM1P-050303D	5V±10%	3.3/3.3VDC	150/150mA
AM1P-050505D		5/5VDC	100/100mA
AM1P-050707D		7.2/7.2VDC	70/70mA
AM1P-050909D		9/9VDC	55/55mA
AM1P-051212D		12/12VDC	42/42mA
AM1P-051515D		15/15VDC	34/34mA
AM1P-051818D		18/18VDC	28/28mA
AM1P-052424D		24/24VDC	21/21mA
AM1P-120303D	12V±10%	3.3/3.3VDC	150/150mA
AM1P-120505D		5/5VDC	100/100mA
AM1P-120707D		7.2/7.2VDC	70/70mA
AM1P-120909D		9/9VDC	55/55mA
AM1P-121212D		12/12VDC	42/42mA
AM1P-121515D		15/15VDC	34/34mA
AM1P-121818D		18/18VDC	28/28mA
AM1P-122424D		24/24VDC	21/21mA
AM1P-240303D	24V±10%	3.3/3.3VDC	150/150mA
AM1P-240505D		5/5VDC	100/100mA
AM1P-240707D		7.2/7.2VDC	70/70mA
AM1P-240909D		9/9VDC	55/55mA
AM1P-241212D		12/12VDC	42/42mA
AM1P-241515D		15/15VDC	34/34mA
AM1P-241818D		18/18VDC	28/28mA
AM1P-242424D		24/24VDC	21/21mA

INPUT CURRENT

No Load / Full Load

5 Vin models	25 / 259mA,typ
12 Vin models	16 / 128mA,typ
24 Vin models	8 / 53mA,typ