

BLFA052SURC-6V-P

HYPER RED


Features

- BUILT-IN CURRENT LIMITING RESISTOR FOR DIRECT APPLICATION OF DIFFERENT ACROSS CURRENT.
- LONG LIFE.
- LOW CURRENT, POWER SAVINGS.
- LOW MAINTENANCE.
- DIFFERENT COLOR AVAILABLE.
- SOLID STATE, HIGH VIBRATION RESISTANT.
- 6V INTERNAL RESISTOR.

Description

The Hyper Red source color devices are made with DH InGaAlP on GaAs substrate Light Emitting Diode.

Package Dimensions

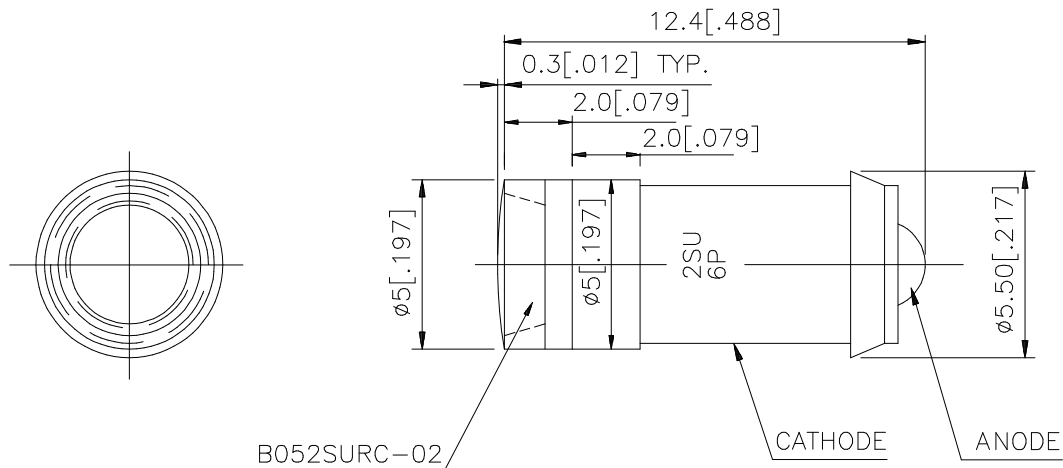

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25 (0.01") unless otherwise noted.
3. Specifications are subject to change without notice.

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) V=6V		Viewing Angle
			Min.	Typ.	2 θ 1/2
BLFA052SURC-6V-P	HYPER RED (InGaAlP)	WATER CLEAR	300	650	110°

Note:


1. θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Electrical / Optical Characteristics at T_A=25°C

Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λ_{peak}	Peak Wavelength	Hyper Red	640	-	nm	V _F =6V
λ_D	Dominate Wavelength	Hyper Red	628	-	nm	V _F =6V
$\Delta\lambda_{1/2}$	Spectral Line Half-width	Hyper Red	27	-	nm	V _F =6V
I _F	Forward Current	Hyper Red	10	-	mA	V _F =6V
I _R	Reverse Current	Hyper Red	-	10	uA	V _R =5V

Absolute Maximum Ratings at T_A=25°C

Parameter	Hyper Red	Units
Power dissipation	70	mW
Forward Voltage	7	V
Reverse Voltage	5	V
Operating Temperature	-40 °C To +70 °C	
Storage Temperature	-40 °C To + 85 °C	

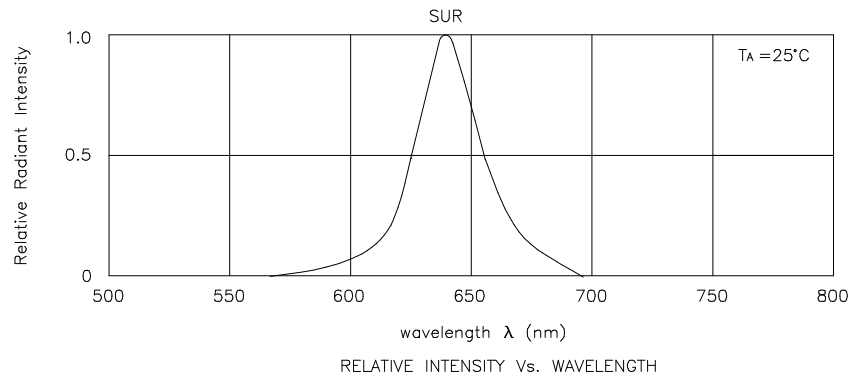

Super Bright Orange

BLFA052SURC-6V-P

