

BLFA062SEC-6V-P

SUPER BRIGHT ORANGE


Features

- BUILT-IN CURRENT LIMITING RESISTOR FOR DIRECT APPLICATION OF DIFFERENT ACROSS CURRENT.
- LONG LIFE.
- LOW MAINTENANCE.
- DIFFERENT COLOR AVAILABLE.
- SOLID STATE, HIGH VIBRATION RESISTANT.
- 6V INTERNAL RESISTOR.

Description

The Super Bright Orange source color devices are made with DH InGaAlP on GaAssubstrate Light Emitting Diode.

Package Dimensions

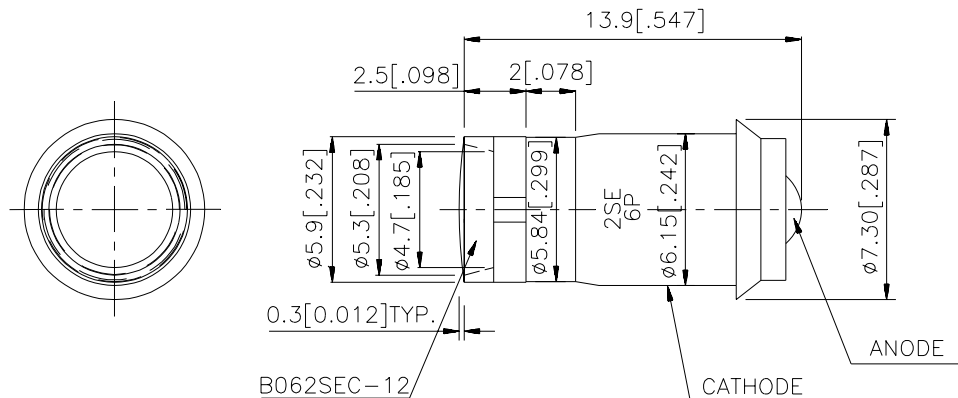

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25 (0.01") unless otherwise noted.
3. Specifications are subject to change without notice.

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) V=6V		Viewing Angle
			Min.	Typ.	2θ1/2
BLFA062SEC-6V-P	SUPER BRIGHT ORANGE(InGaAlP)	WATER CLEAR	480	750	110°

Note:


1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Electrical / Optical Characteristics at T_A=25°C

Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λ _{peak}	Peak Wavelength	Super Bright Orange	610		nm	V _F =6V
λ _D	Dominate Wavelength	Super Bright Orange	601		nm	V _F =6V
Δλ _{1/2}	Spectral Line Half-width	Super Bright Orange	29		nm	V _F =6V
I _F	Forward Current	Super Bright Orange	10		mA	V _F =6V
I _R	Reverse Current	Super Bright Orange		10	uA	V _R = 5V

Absolute Maximum Ratings at T_A=25°C

Parameter	Super Bright Orange	Units
Power dissipation	70	mW
Forward Voltage	7	V
Reverse Voltage	5	V
Operating Temperature	-40 °C To +70 °C	
Storage Temperature	-40 °C To + 85 °C	

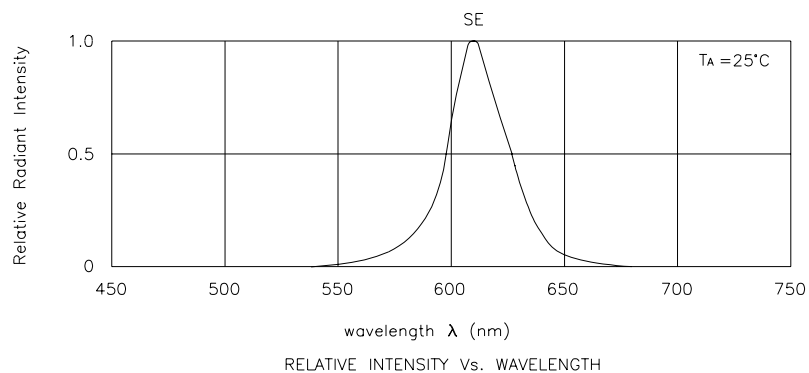

Super Bright Orange

BLFA062SEC-6V-P

