
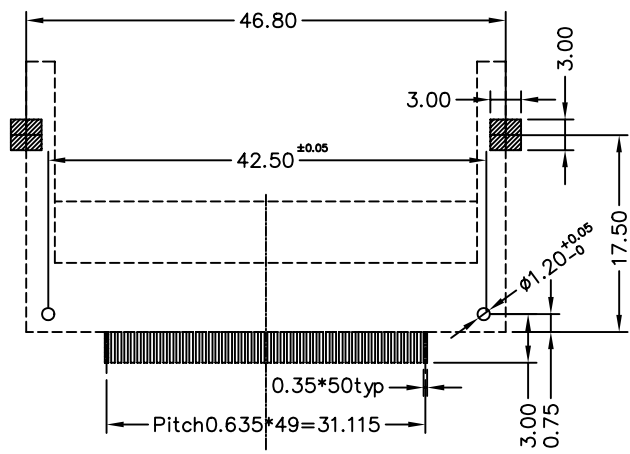



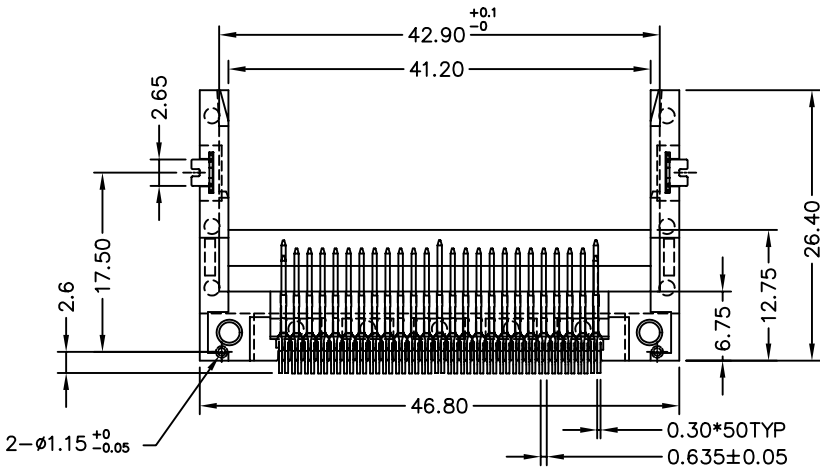

PCB Layout



NOTE:

A. Material:

1. Housing : LCP 30% G.F. , UL94-V0 rated
2. Contact : Copper allpy
3. Pad : Brass

B. Plating

1. Contact : Underplating 50u" min Nickel,
Contant area 15u" AU over Nickel plated.
Solder tail 100u" min Sn/Pb over Nickel plated.
2. Ped : 100u" min Sn/Pb over 50u" min Nickel plated.

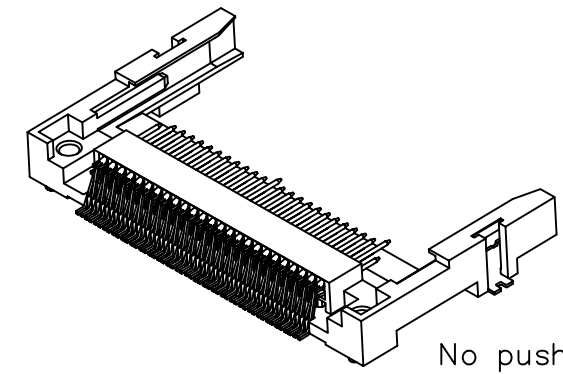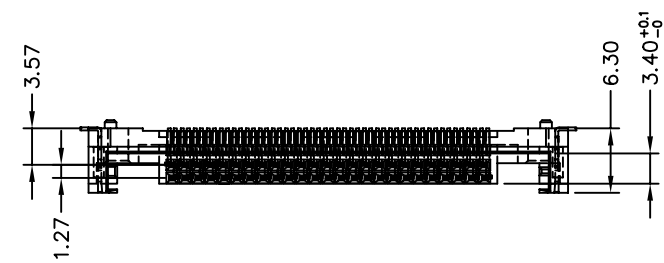

Dimension L

Pin type	Circuit No.	Dimensions mm
Detect	1,13,38,50	5.0 ± 0.1
General	2 to 12 , 14 to 24 27 to 37 , 39 to 49	4.25 ± 0.1
Power	25 , 26	3.5 ± 0.1

PART NO. CFC-PW021-50													
DWG NO. CFC-PW021-50		APPROVED BY CY		TOLERANCES ARE .X ±0.125 .XX ±0.050 .XXX±0.010		DESCRIP TION:		Compact Flash Card Socket SMT TYPE (Standard type fit Type I & Type II CF Card) Stand Off : 2.1mm & POST L=42.5mm					
FILE NO.		DRAWING BY				AREA		REVISIONS		HK		DATE	
UNIT / mm		SCALE 1:1											
		PROJECTION											