



NOTE:

A. Material:

1. Housing : LCP 30% G.F. , UL94-V0 rated
2. Contact : Copper alloy
3. Pad : Brass
4. Rotating arm : Stainless steel $t=0.40$
5. Push bar : Stainless steel $t=0.30$
6. Button : PBT 30% G.F. , UL94-V0 rated

B. Plating

1. Contact : Underplating 50u" min Nickel,
Contact area 15u" AU over Nickel plated.
Solder tail 100u" min Sn/Pb over Nickel plated.
2. Ped : 100u" min Sn/Pb over 50u" min Nickel plated.

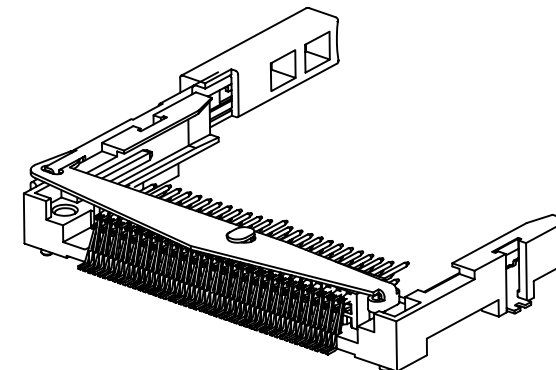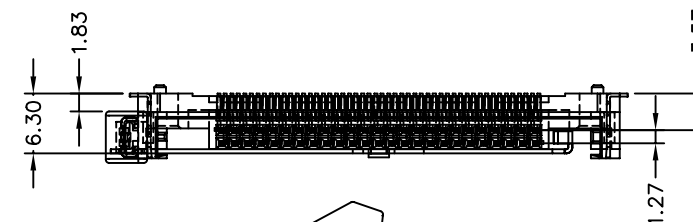



Right hand push+Button

Dimension L

Pin type	Circuit No.	Dimensions mm
Detect	1,13,38,50	5.0 ± 0.1
General	2 to 12 , 14 to 24 27 to 37 , 39 to 49	4.25 ± 0.1
Power	25 , 26	3.5 ± 0.1

DESCRIPTION: Compact Flash Card Socket SMT TYPE
(Reverse type fit Type II CF Card)
Stand Off : 2.1mm & POST L=42.5mm

AREA	REVISIONS	HK	DATE
------	-----------	----	------

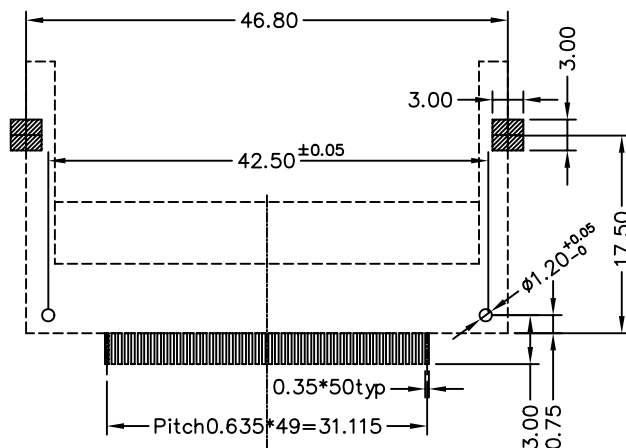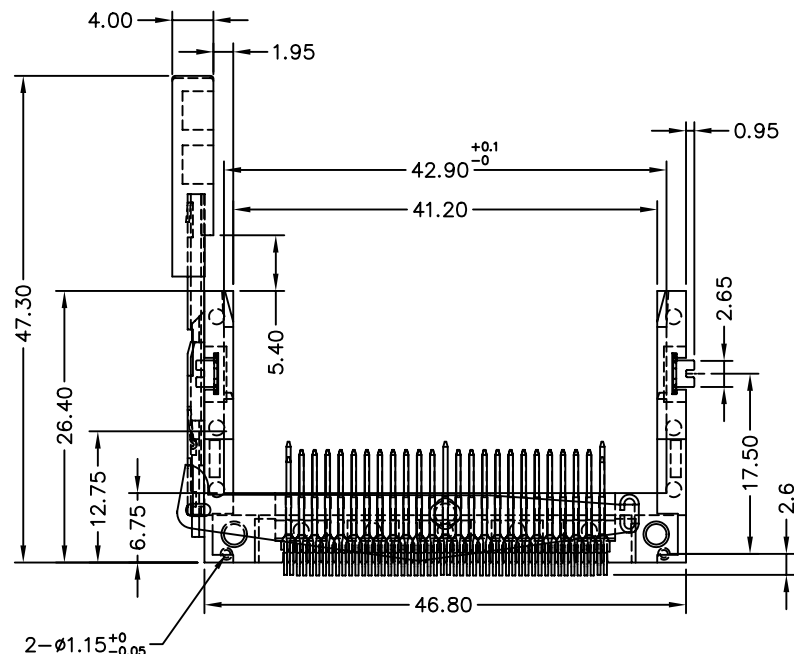

PCB Layout

PART NO. CFC-PW222RS-50

DWG NO. CFC-PW222RS-50

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ±0.125
.XX ±0.050
.XXX ±0.010