

PRELIMINARY SPEC

XPower


Part Number : KA-1011SEC28

Reddish-Orange

PATENT PENDING

Features


- PLCC-4 PACKAGE.
- SINGLE COLOR.
- HIGH LUMINANCE.
- HIGH POWER, OPERATING CURRENT @350mA.
- SUITABLE FOR ALL SMT ASSEMBLY METHODS.
- PACKAGE : 500PCS / REEL.
- MOISTURE SENSITIVITY LEVEL : LEVEL 4.
- RoHS COMPLIANT.

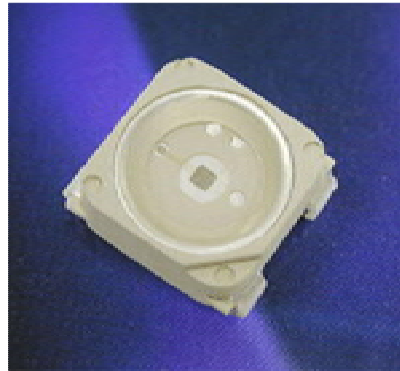

Outline Drawings

Applications

- traffic signaling
- backlighting (illuminated advertising , general lighting)
- interior and exterior automotive lighting
- substitution of micro incandescent lamps
- portable light source (e.g. bicycle flashlight)
- signal and symbol luminaire for orientation
- marker lights (e.g. steps, exit ways, etc)
- decorative and entertainment lighting
- indoor and outdoor commercial and residential architectural lighting

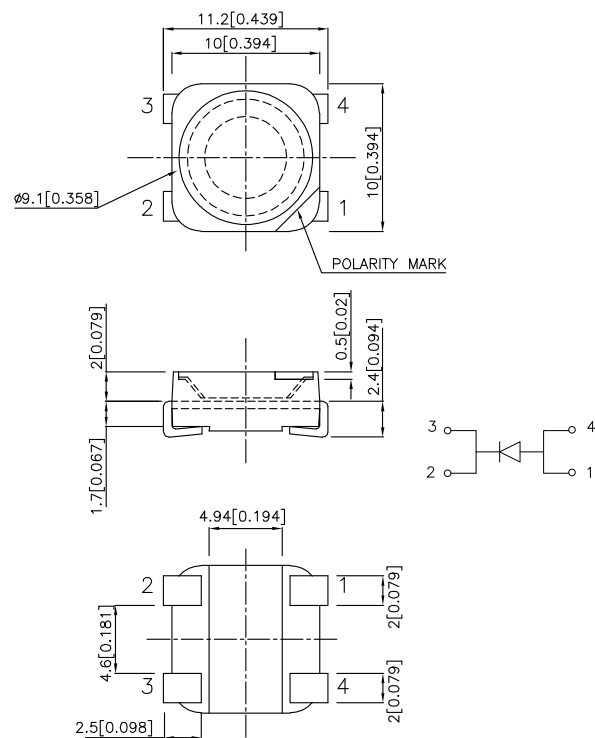

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
3. Specifications are subject to change without notice.

Selection Guide

Part No.	Dice	Lens Type	luminous Intensity Iv(cd)@ 350 mA [1]		Φ_v (lm) @ 350mA		Viewing Angle [2]
			Min.	Typ.	Min.	Typ.	2 θ 1/2
KA-1011SEC28	Reddish-Orange (InGaAlP)	WATER CLEAR	24	40	15	22	45°

Absolute Maximum Ratings at T_A=25°C

Parameter	Symbol	Value	Unit
Power dissipation	P _t	1.2	W
Reverse Voltage	V _R	5	V
Junction temperature	T _J	110	°C
Operating Temperature	T _{op}	-40 To +85	°C
Storage Temperature	T _{stg}	-40 To +85	°C
DC Forward Current[1]	I _F	350	mA
Peak Forward Current [3]	I _{FM}	500	mA
Thermal resistance [1]	R _{th}	60	°C/W

Notes:

1.Results from mounting on PC board FR4(pad size≥100mm² per pad), mounted on pc board-metal core PCB is recommend for lowest thermal Resistance.


2. θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

3.1/10 Duty Cycle, 0.1ms Pulse Width.



Electrical / Optical Characteristics at T_A=25°C

Parameter	Symbol	Value	Unit
Wavelength at peak emission I _F =350mA [Typ.]	λ_{peak}	640	nm
Dominant Wavelength I _F =350mA [Typ.]	λ_{dom}	625	nm
Spectral bandwidth at 50% $\Phi_{REL MAX}$ I _F =350mA [Typ.]	$\Delta\lambda$	30	nm
Viewing angle at 50% Φ_v [Typ.]	θ	45	°
Forward Voltage I _F =350mA [Min.]	V _F	2.0	V
Forward Voltage I _F =350mA [Typ.]		2.5	
Forward Voltage I _F =350mA [Max.]		3.0	
Reverse Current (V _R =5V) [Typ.]	I _R	10	μA
Temperature coefficient of λ_{peak} I _F =350mA, -10°C≤ T≤100°C [Typ.]	TC λ_{peak}	0.14	nm/°C
Temperature coefficient of λ_{dom} I _F =350mA, -10°C≤ T≤100°C [Typ.]	TC λ_{dom}	0.12	nm/°C
Temperature coefficient of V _F I _F =350mA, -10°C≤ T≤100°C [Typ.]	TC _V	-3.0	mV/°C


KA-1011SEC28

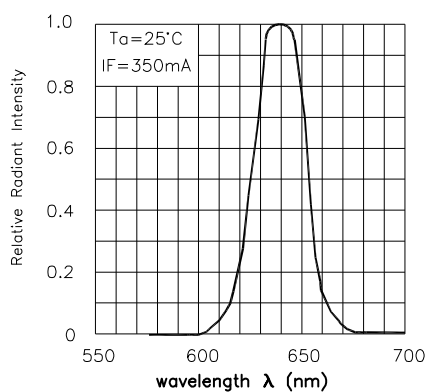


RELATIVE INTENSITY Vs. WAVELENGTH

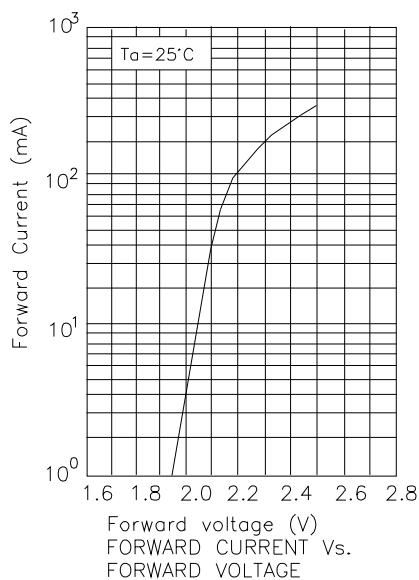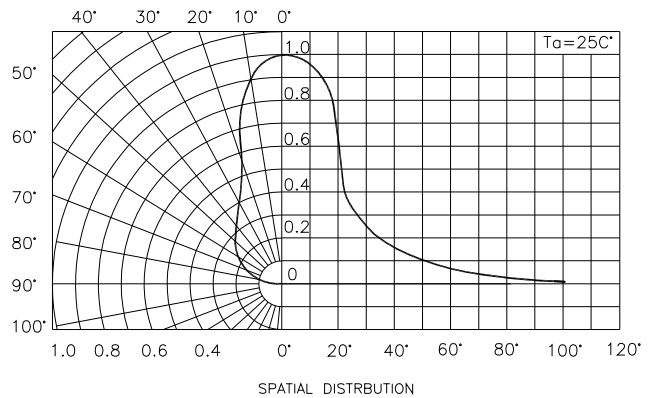


FORWARD CURRENT Vs. FORWARD VOLTAGE

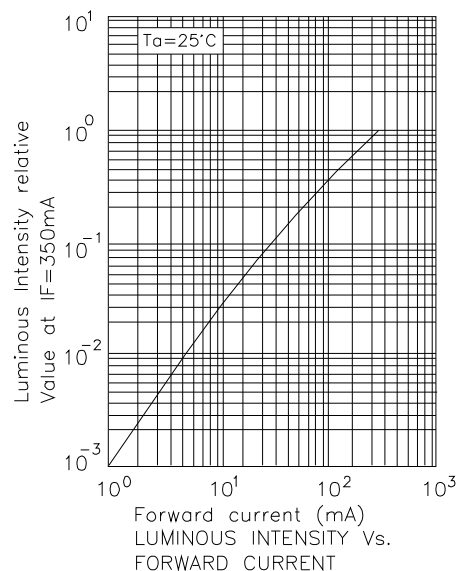

LUMINOUS INTENSITY Vs. FORWARD CURRENT

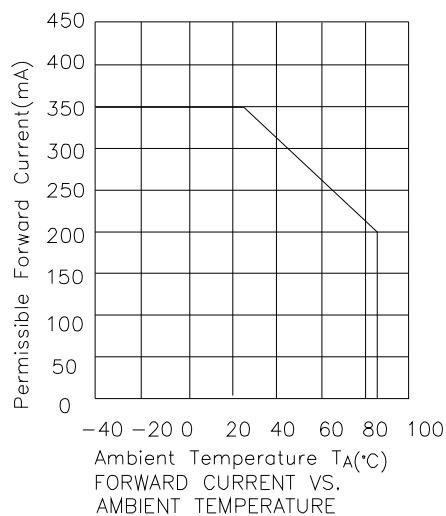

FORWARD CURRENT Vs. AMBIENT TEMPERATURE

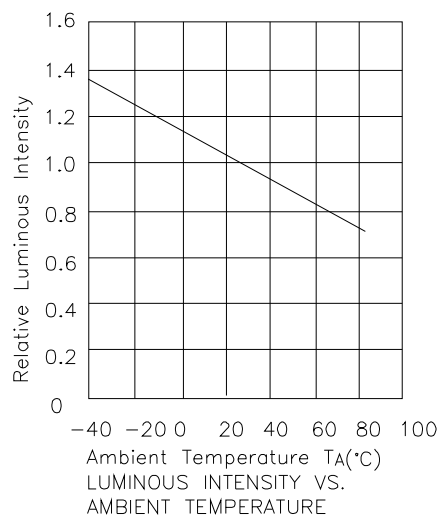

LUMINOUS INTENSITY Vs. AMBIENT TEMPERATURE

