

# COSMO

## FEATURES

- Normally Open, Single Pole Single Throw
- Control 60VAC or DC Voltage
- Switch 400mA Loads
- LED control Current, 5mA
- Low ON-Resistance
- dv/dt, >500V/ms
- Isolation Test Voltage, 3750VACrms

## Absolute Maximum Ratings( $T_a=25^\circ\text{C}$ )

### Emitter(Input)

Reverse Voltage .....	5.0V
Continuous Forward Current .....	50mA
Peak Forward Current .....	1A
Power Dissipation .....	100mW
Derate Linearly from $25^\circ\text{C}$ .....	1.3mW/ $^\circ\text{C}$


### Detector(Output)

Output Breakdown Voltage .....	$\pm 60\text{V}$
Continuous Load Current .....	$\pm 400\text{mA}$
Power Dissipation .....	500mW




### General Characteristics

Isolation Test Voltage .....	3750VACrms
Isolation Resistance $V_{io}=500\text{V}$ , $T_a=25^\circ\text{C}$ .....	$\geq 10^{10}\Omega$
Total Power Dissipation .....	550mW
Derate Linearly from $25^\circ\text{C}$ .....	2.5mW/ $^\circ\text{C}$
Storage Temperature Range.....	-40°C to +125°C
Operating Temperature Range.....	-30°C to +85°C
Junction Temperature .....	100°C
Soldering Temperature, 2mm from case, 10 sec .....	260°C

- Turn on/Turn off time

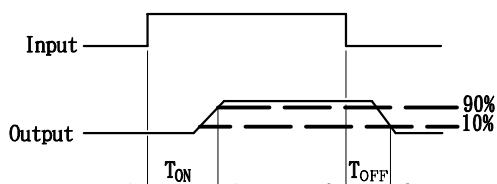

## V212/V212A HIGH VOLTAGE, PHOTO MOS RELAY

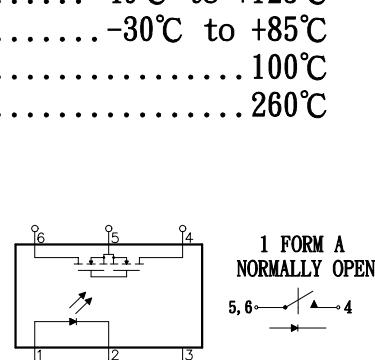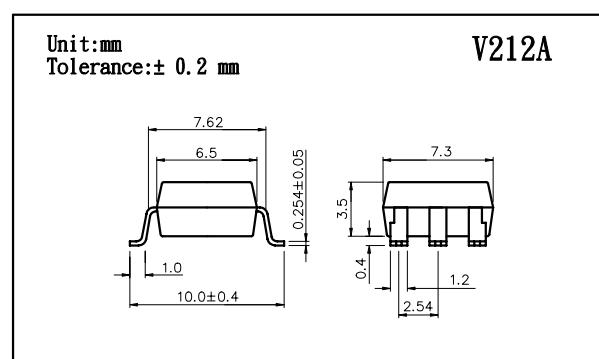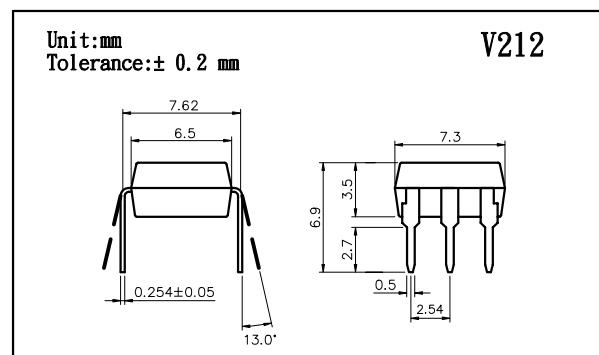

# V212/V212A

## HIGH VOLTAGE, PHOTO E-MOS RELAY

### Characteristics


(Ta=25°C)

Description	Symbol	Min.	Typ.	Max.	Unit	Test Condition
<b>Emitter (Input)</b>						
Forward Voltage	VF		1.2	1.5	V	IF=10mA
Operation Input Current	IFON			5	mA	VL=± 20V, IL=100mA t=10ms
Recovery Input Current	IFOFF	0.2			mA	VL=± 20V, IL<=5uA
<b>Detector (output)</b>						
Output Breakdown Voltage	VB	60			V	IB=50uA
Output Off-State Leakage	IT(OFF)		0.2	1	uA	VT=60V, IF=0mA
I/O Capacitance	CISO		0.8		pF	IF=0, f=1MHz
ON Resistance	Con- nection	A		0.83	2.50	Ω
		B	RON	0.44	1.25	
		C		0.25	0.63	
Turn-on Time	TON		0.2	1.5	ms	IF=10mA, VL=± 20V
Turn-off Time	TOFF		0.3	1.5	ms	t=10ms, IL=± 100mA


Mos Relay Schematic and Wiring Diagrams						
Type	Schematic	Output configuration	Load	Connection	Wiring Diagrams	
V210 & V210A		1a	AC/DC	A		

### DATA CURVE


Load current vs. ambient temperature  
Allowable ambient temperature:  
-40°C to +85°C

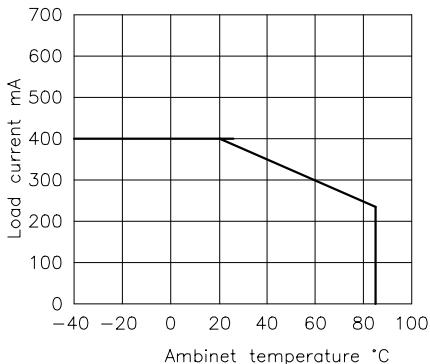

On resistance vs. ambient temperature  
Across terminals 4 and 6 pin  
LED current: 5mA  
Continuous load current: 130mA(DC)

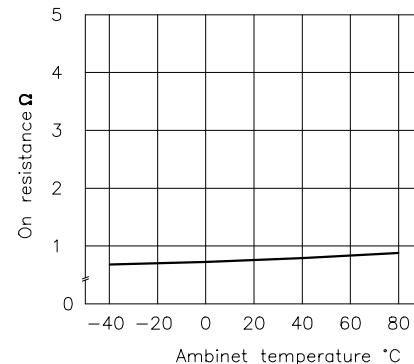

Turn on time vs. ambient temperature  
Load voltage 60V(DC)  
LED current: 5mA  
Continuous load current: 130mA(DC)

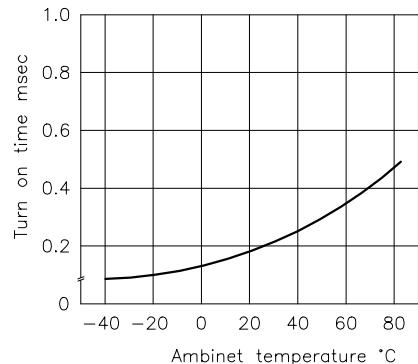


# V212/V212A


## HIGH VOLTAGE, PHOTO E<sup>MOS</sup> RELAY

### V212/V212A


Turn off time vs. ambient temperature  
LED current: 5mA; Load voltage: 60V(DC)  
Continuous load current: 130mA(DC)

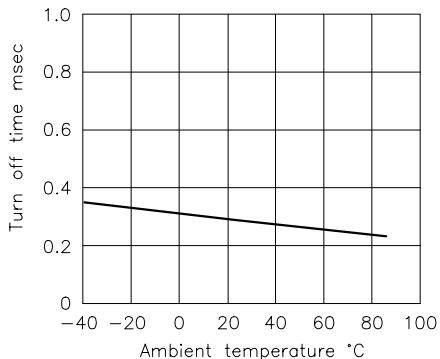


LED operate vs. ambient temperature  
Load voltage: 60V(DC)  
Continuous load current: 130mA(DC)

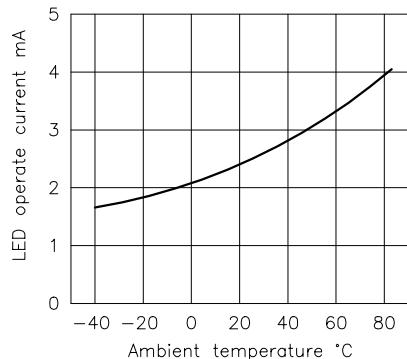


LED turn off current vs. ambient temperature  
Load voltage: 60V(DC)  
Continuous load current: 130mA(DC)

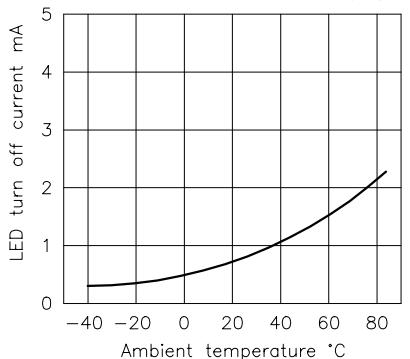


LED dropout voltage vs. ambient temperature  
LED current: 5 to 50mA

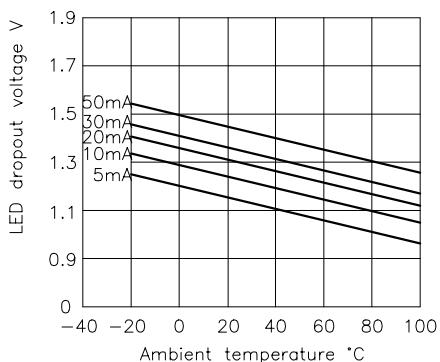


Voltage vs. current characteristics of output at MOS FET portion  
Measured portion: across terminals 4 and 6 pin  
Ambient temperature: 25°C




Off state leakage current  
Across terminals 4 and 6 pin  
Ambient temperature: 25°C

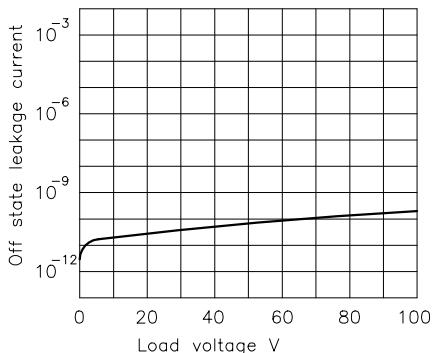

LED forward current vs. turn on time  
Across terminals 4 and 6 pin; Load voltage: 60V(DC); Continuous load current: 130mA(DC); Ambient temperature: 25°C

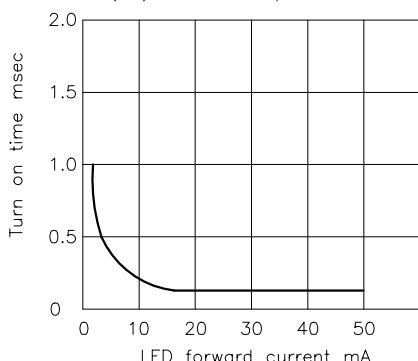

LED forward current vs. turn off time  
Across terminals 4 and 6 pin; Load voltage: 60V(DC); Continuous load current: 130mA(DC); Ambient temperature: 25°C

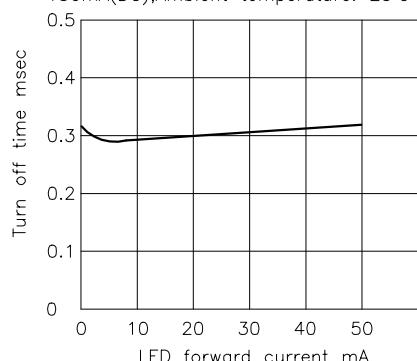

Applied voltage vs. output capacitance  
Across terminals 4 and 6 pin  
Frequency: 1MHz; Ambient temperature: 25°C

