

cosmo**High Reliability Photo Coupler****KP6010**

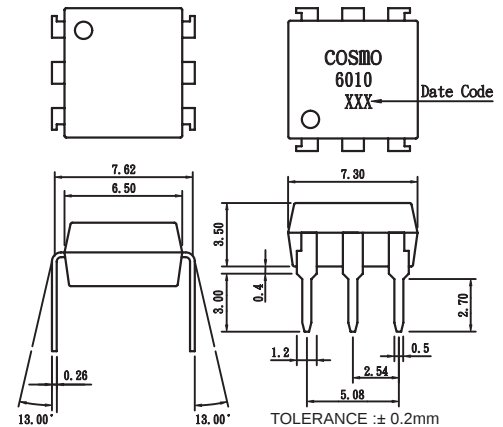
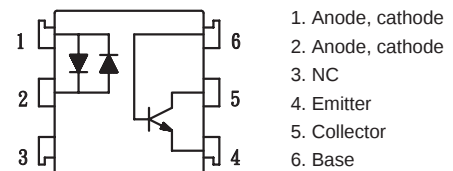
UL 1577 (File No.E169586) VDE 0884 / 0860 / 0805 (File No.101347)

Features

1. Current transfer ratio
(CTR:MIN.60% at $I_F=\pm 1\text{mA}$, $V_{ce}=5\text{V}$)
2. High isolation voltage between input and output
(Viso:5000Vrms).
3. Compact dual-in-line package.
4. Ac input.
5. Available package : DIP/ SMD/ H. (For Package Dimension please refer to page 82)

Applications

1. Programmable Controller Applications for Low Input Photocouplers and High Vceo Photocouplers.
2. Telephone sets, telephone exchangers.
3. System appliances, Limit Switches, Sensors, Thermostats and Transducers etc.
4. Signal transmission between circuits of different potentials and impedances.

Outside Dimension : Unit (mm)**Schematic : Top View****Absolute Maximum Ratings**

(Ta=25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I_F	± 50	mA
	Peak forward current	I_{FM}	± 1	A
	Power dissipation	P_D	70	mW
Output	Collector-emitter voltage	V_{CEO}	60	V
	Emitter-collector voltage	V_{ECO}	6	V
	Collector-base voltage	V_{CBO}	60	V
	Emitter-base voltage	V_{EBO}	6	V
	Collector current	I_C	50	mA
	Collector power dissipation	P_C	150	mW
Total power dissipation		P_{tot}	200	mW
Isolation voltage 1 minute		Viso	5000	Vrms
Operating temperature		T_{opr}	-30 to +100	°C
Storage temperature		T_{stg}	-55 to +125	°C
Soldering temperature 10 second		T_{sol}	260	°C

Electro-optical Characteristics

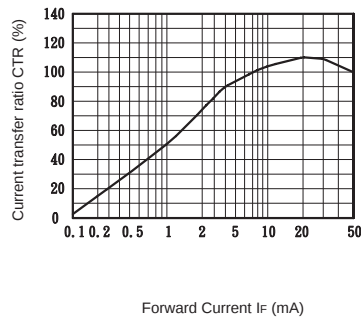
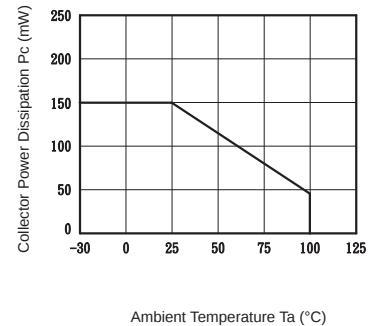
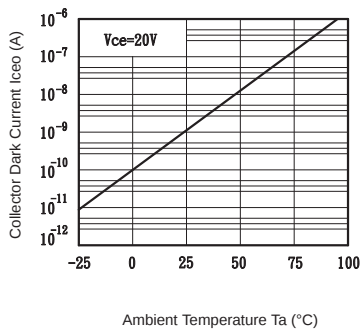
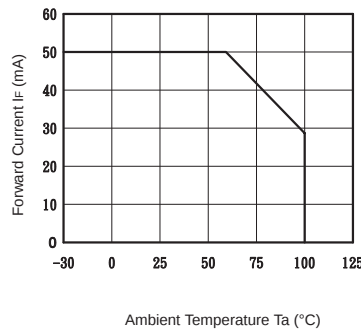
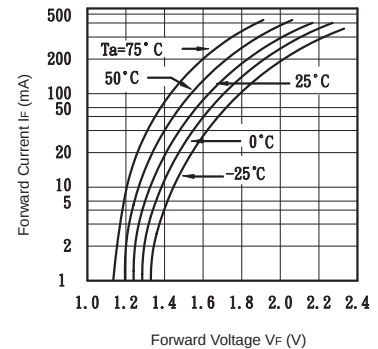
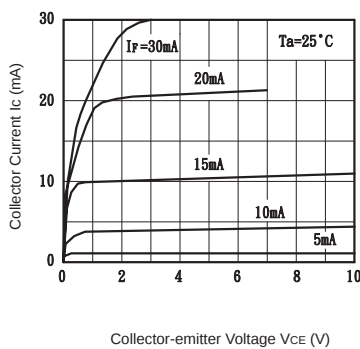
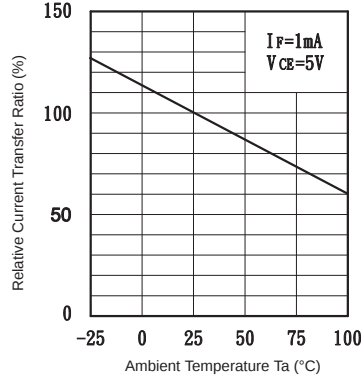
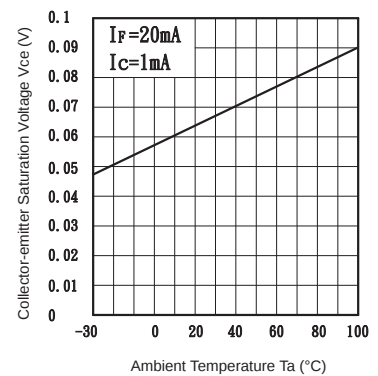
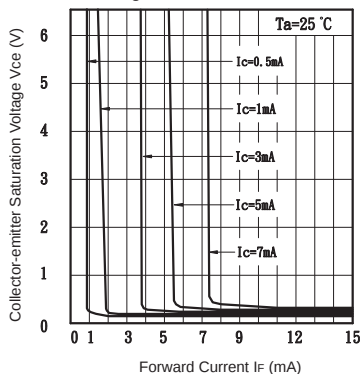
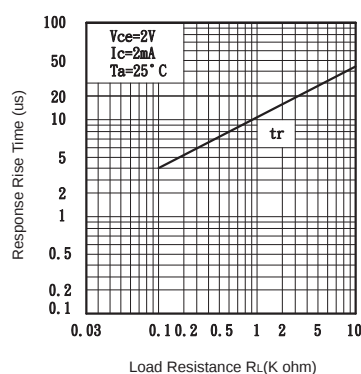
(Ta=25°C)

	Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V_F	$I_F = \pm 20\text{mA}$	—	1.2	1.4	V
	Peak forward voltage	V_{FM}	$I_{FM} = \pm 0.5\text{A}$	—	—	3.5	V
	Terminal capacitance	C_t	$V=0$, $f=1\text{kHz}$	—	30	—	pF
Output	Collector dark current	I_{CEO}	$V_{CE} = 20\text{V}$, $I_F = 0$	—	—	0.1	uA
Transfer characteristics	Current transfer ratio	CTR	$I_F = \pm 1\text{mA}$, $V_{CE} = 5\text{V}$	60	—	600	%
	Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F = \pm 20\text{mA}$, $I_C = 1\text{mA}$	—	0.1	0.3	V
	Isolation resistance	Riso	DC500V	5×10^{10}	10^{11}	—	ohm
	Floating capacitance	C_f	$V=0$, $f=1\text{MHz}$	—	0.6	1.0	pF
	Cut-off frequency	f_c	$V_{CC} = 5\text{V}$, $I_C = 2\text{mA}$, $R_L = 100\text{ohm}$	—	80	—	kHz
	Response time (Rise)	t_r	$V_{CE} = 2\text{V}$, $I_C = 2\text{mA}$, $R_L = 100\text{ohm}$	—	5	20	us
	Response time (Fall)	t_f		—	4	20	us

cosmo**KP6010**

Classification table of current transfer ratio is shown below.

Model NO.	Rank mark	CTR (%)
KP6010	A	60 TO 600
KP6010	B	60 TO 300

Fig.1 Current Transfer Ratio vs. Forward Current**Fig.2** Collector Power Dissipation vs. Ambient Temperature**Fig.3** Collector Dark Current vs. Ambient Temperature**Fig.4** Forward Current vs. Ambient Temperature**Fig.5** Forward Current vs. Forward Voltage**Fig.6** Collector Current vs. Collector-emitter Voltage**Fig.7** Relative Current Transfer Ratio vs. Ambient Temperature**Fig.8** Collector-emitter Saturation Voltage vs. Ambient Temperature**Fig.9** Collector-emitter Saturation Voltage vs. Forward Current**Fig.10** Response Time vs. Load Resistance**Fig.11** Response Time vs. Load Resistance