



150W Single Output with PFC Function

- Universal AC input / Full range
- PF > 0.98@115VAC; >0.96@230VAC

- Cooling by free air convection
- Protections: Short circuit / Overload / Over voltage / OTP(option)
- 3 years warranty

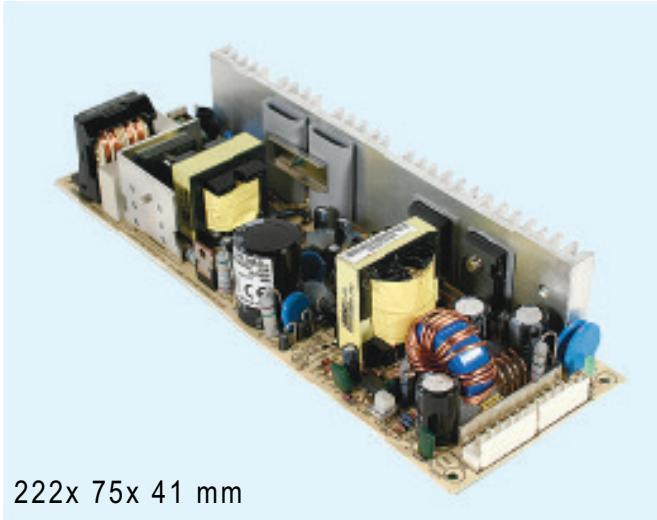

222x 75x 41 mm

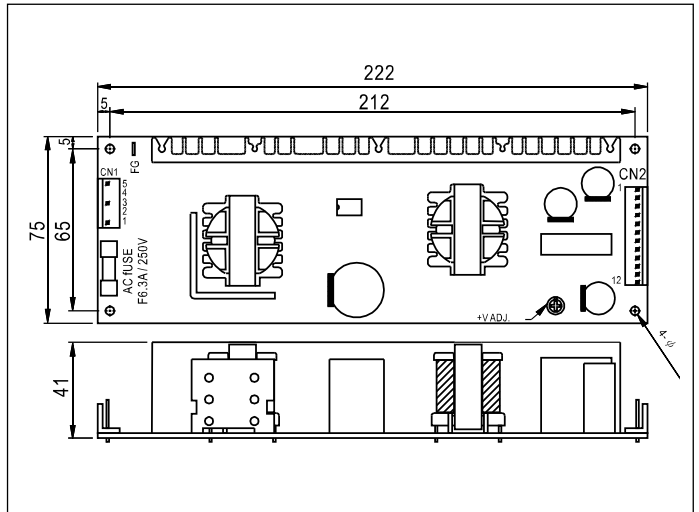

- AC input voltage range ····· 85~264VAC; 120~370VDC
- Leakage current ····· Less than 3.5mA at 240VAC
- DC adjustment range ····· -5~+10% rated output voltage
- Overload protection ····· 105%~150% constant current limiting, auto-recovery
- Over voltage protection ····· 110~135% rated output voltage
- Withstand voltage ····· I/P-O/P: 3KVAC, I/P-FG:1.5KVAC, 1minute
- Working temperature ····· -10°C~60°C (refer to output derating curve)
- Safety standards ····· UL60950-1, TUV EN60950-1 approved
- EMC standards ····· EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204
- Connection ····· 5+6Px2 / 3.96mm pitch, JST P/N: B5P / B6Px2-VH
- Packing ····· 0.62kg ; 24pcs/ 16.6kg / 1.39CUFT

Stock No.	Model No.	Output	Tol.	R&N	Effi.
12331	LPP-150-3.3	3.3V, 30A	±2%	100mV	66%
12332	LPP-150-5	5V, 30A	±2%	100mV	72%
12333	LPP-150-7.5	7.5V, 20A	±2%	100mV	76%
12334	LPP-150-12	12V, 12.5A	±2%	100mV	79%
12335	LPP-150-13.5	13.5V, 11.2A	±2%	100mV	80%
12336	LPP-150-15	15V, 10A	±2%	100mV	80%
12337	LPP-150-24	24V, 6.3A	±1%	150mV	83%
12338	LPP-150-27	27V, 5.6A	±1%	150mV	83%
12339	LPP-150-48	48V, 3.2A	±1%	250mV	83%