



# SR302 THRU SR306

## 3.0 AMPS. Schottky Barrier Rectifiers

Voltage Range  
20 to 60 Volts  
Current  
3.0 Amperes


### Features

- ✧ Low forward voltage drop
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability

### Mechanical Data

- ✧ Cases: DO-201AD molded plastic
- ✧ Epoxy: UL 94V-O rate flame retardant
- ✧ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode end
- ✧ High temperature soldering guaranteed: 250°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ✧ Weight: 1.1 grams

### DO-201AD

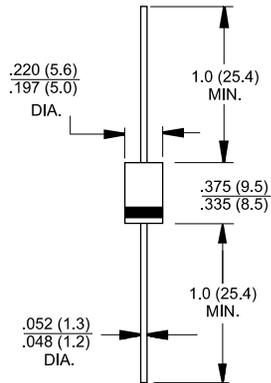

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

Type Number	SR302	SR303	SR304	SR305	SR306	Units	
Maximum Recurrent Peak Reverse Voltage	20	30	40	50	60	V	
Maximum RMS Voltage	14	21	28	35	42	V	
Maximum DC Blocking Voltage	20	30	40	50	60	V	
Maximum Average Forward Rectified Current See Fig. 1	3.0					A	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method )	80					A	
Maximum Instantaneous Forward Voltage @3.0A	0.55		0.70			V	
Maximum D.C. Reverse Current @ T <sub>A</sub> =25°C at Rated DC Blocking Voltage @ T <sub>A</sub> =100°C	0.5			30			mA mA
Typical Thermal Resistance (Note 1) R <sub>θJA</sub>	40					°C/W	
Typical Junction Capacitance (Note 2)	300			250			pF
Operating Junction Temperature Range T <sub>J</sub>	-65 to +125			-65 to +150			°C
Storage Temperature Range T <sub>STG</sub>	-65 to +150					°C	

Notes: 1. Thermal Resistance from Junction to Ambient Vertical P.C. Board Mounting, 0.375"(9.5mm) Lead Length  
2. Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.

## RATINGS AND CHARACTERISTIC CURVES (SR302 THUR SR306)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

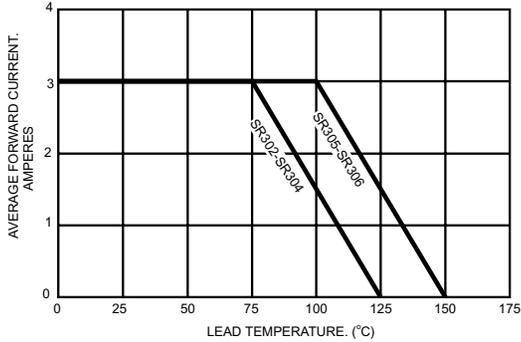


FIG.2- TYPICAL FORWARD CHARACTERISTICS

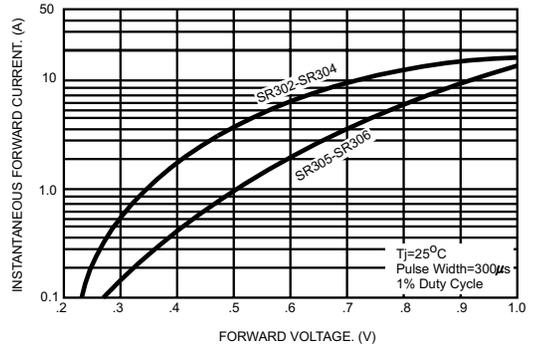


FIG.3- TYPICAL REVERSE CHARACTERISTICS

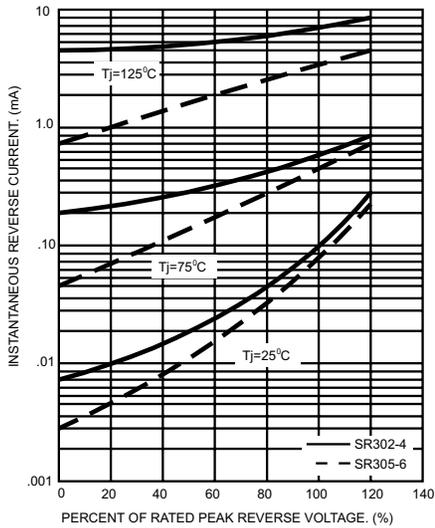


FIG.4- TYPICAL JUNCTION CAPACITANCE

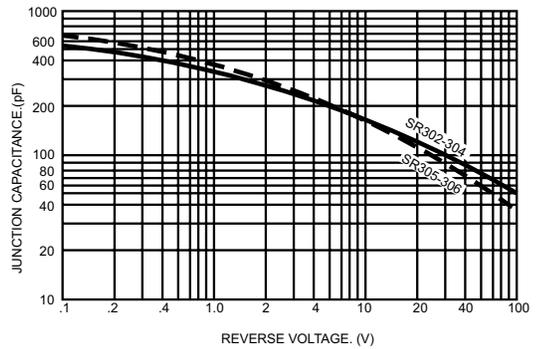


FIG.5- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

