

a

# MicroConverter<sup>®</sup>, Dual 16 Bit ADCs with Embedded 62KB FLASH MCU

## Preliminary Technical Data

## ADuC836

### FEATURES

#### High Resolution Sigma-Delta ADCs

- Two Independent ADCs (16-Bit Resolution)
- 16-Bit No Missing Codes, Primary ADC
- 13-Bit p-p Resolution @ 20 Hz, 20 mV Range
- 16-Bit p-p Resolution @ 20 Hz, 2.56 V Range

#### Memory

- 62Kbytes On-Chip Flash/EE Program Memory
- 4 KBytes On-Chip Flash/EE Data Memory
- Flash/EE, 100 Yr Retention, 100 Kcycles Endurance
- In Circuit Serial Download
- High Speed User Bootload (5s Download)
- 2304 Bytes On-Chip Data RAM

#### 8051 Based Core

- 8051-Compatible Instruction Set (12.58 MHz Max)
- 32 kHz External Crystal, On-Chip Programmable PLL
- 11 Interrupt Sources, Two Priority Levels
- Dual Data Pointer
- Extended 11-bit Stack Pointer

#### On-Chip Peripherals

- 12-Bit Voltage Output DAC
- Dual 16-Bit  $\Sigma\Delta$  DACs/PWMs
- On-Chip Temperature Sensor
- Dual Excitation Current Sources
- Time Interval Counter (Real Time Clock/WakeUp Cct)
- UART and SPI<sup>®</sup> Serial I/O
- Timer 3 for high speed UART baud rates (incl 115,200)
- Watchdog Timer (WDT), Power Supply Monitor (PSM)

#### Power

- Specified for 3 V and 5 V Operation
- Normal: 3 mA @ 3 V (Core CLK = 1.5 MHz)
- Power-Down: 20 $\mu$ A max with wake-up cct running

### GENERAL DESCRIPTION

The ADuC836 is a complete smart transducer front-end, integrating two high-resolution sigma delta ADCs, an 8-bit MCU, and program/data Flash/EE Memory on a single chip.


The two independent ADCs (Primary and Auxiliary) include a temperature sensor and a PGA (allowing direct measurement of low-level signals). The ADCs with on-chip digital filtering and programmable output data rates are intended for the measurement of wide dynamic range, low frequency signals, such as those in weigh scale, strain-gauge, pressure transducer, or temperature measurement applications.

The device operates from a 32 kHz crystal with an on-chip PLL generating a high-frequency clock of 12.58 MHz. This clock is, routed through a programmable clock divider from which the MCU core clock operating frequency is generated. The microcontroller core is an 8052 and therefore 8051-instruction-set-compatible with 12 core clock periods per machine cycle.

#### REV. PrA

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

### FUNCTIONAL BLOCK DIAGRAM

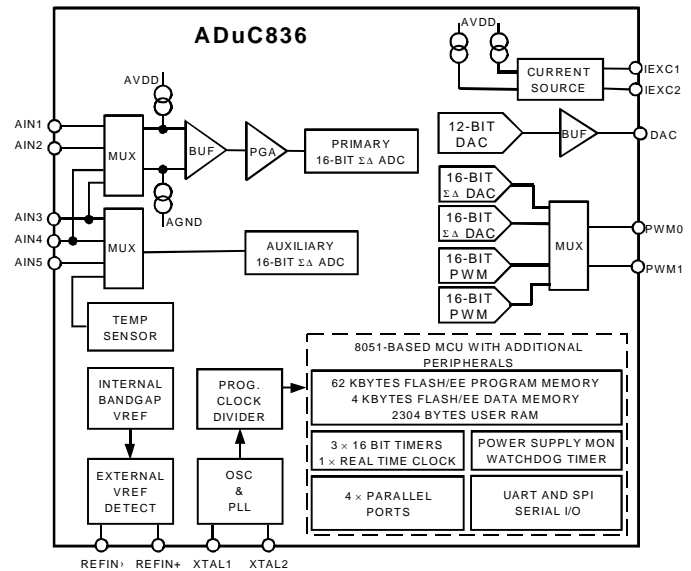

62 Kbytes of nonvolatile Flash/EE program memory are provided on-chip. 4 Kbytes of nonvolatile Flash/EE data memory, 256 bytes RAM and 2 Kbytes of extended RAM are also integrated on-chip. The program memory can be configured as data memory in datalogging applications.

The ADuC836 also incorporates additional analog functionality with a 12-bit DAC, dual current sources, power supply monitor, and a bandgap reference. On-chip digital peripherals include two 16-bit  $\Sigma\Delta$  DACs/PWM, watchdog timer, real time clock (time interval counter), four timers/counters, and two serial I/O ports (UART and SPI).

On-chip factory firmware supports in-circuit serial download (via UART), as well as single-pin emulation mode via the EA pin. A functional block diagram of the ADuC836 is shown above with a more detailed block diagram shown in figure 11 (page 18).

The part operates from a 3V or a 5V supply. When operating from 3V the power dissipation for the part is below 10mW. The ADuC836 is housed in a 52-lead MQFP package.

### APPLICATIONS

- Intelligent Sensors (IEEE1451.2-Compatible)
- Weigh Scales
- Portable Instrumentation
- Pressure Transducers
- 4-20 mA Transmitters

MicroConverter is a registered trademark of Analog Devices, Inc.  
SPI is a registered trademark of Motorola Inc.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.  
Tel: 781/329-4700 www.analog.com  
Fax: 781/326-8703 © Analog Devices, Inc., 2002