

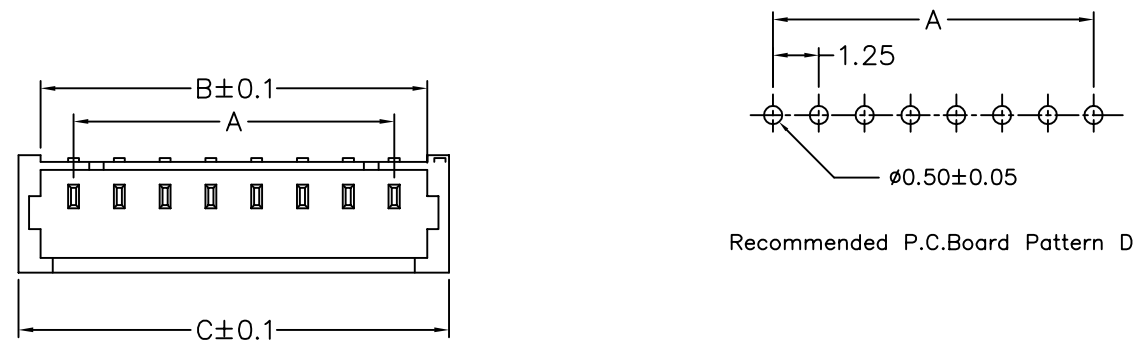
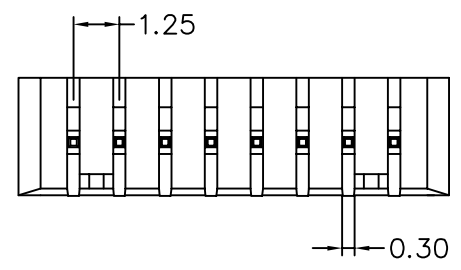


SPECIFICATIONS

Current Rate : 1AMP.
 Insulation Resistance : 500Megohms Min.
 Contact Resistance : 20Milliohms Max.
 Dielectric Voltage : 500V AC For 1 Minute
 Operation Temperature : -25°C To +85°C
 Insulator : High Temperature Plastic
 Nylon 46, UL94V-0
 Pin: High Strength Brass With Tin
 Over Nickel Plated

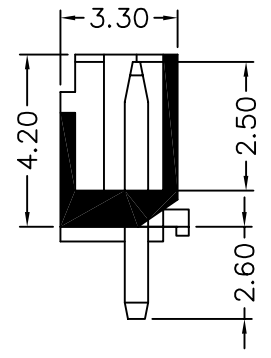

Recommended P.C.Board Pattern Dim.

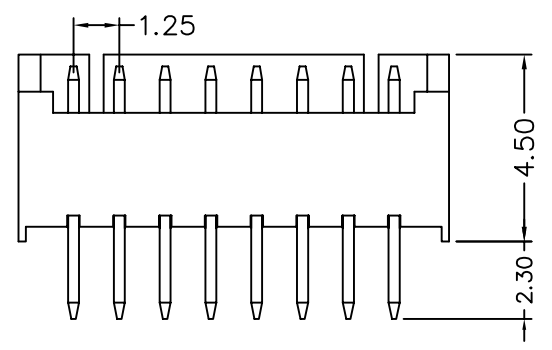

CKT	A	B	C
2	1.25	3.15	4.25
3	2.50	4.40	5.50
4	3.75	5.65	6.75
5	5.00	6.90	8.00
6	6.25	8.15	9.25
7	7.50	9.40	10.50
8	8.75	10.65	11.75
9	10.00	11.90	13.00
10	11.25	13.15	14.25
11	12.50	14.40	15.50
12	13.75	15.65	16.75
13	15.00	16.90	18.00
14	16.25	18.15	19.25
15	17.50	19.40	20.50

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.	UNIT	mm	AREA	REVISIONS	CHK	DATE		
		MEI									REV.	A
		CHECKED BY										
RAN		DRAWING BY		HZF		SCALE		NONE				
HZF		A		mm		AREA		REVISIONS		CHK		