



• **SFM-1443**




FEATURES:

- Super miniature
- Super thin
- Low current


APPLICATIONS:

- Miniature electronic device

DIMENSIONS: (Unit: mm)

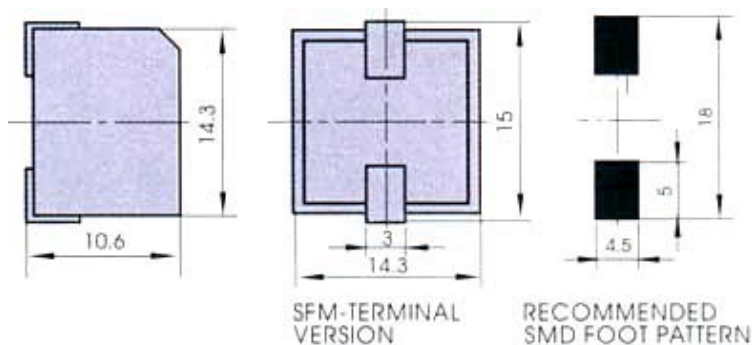

CHARACTERISTICS:

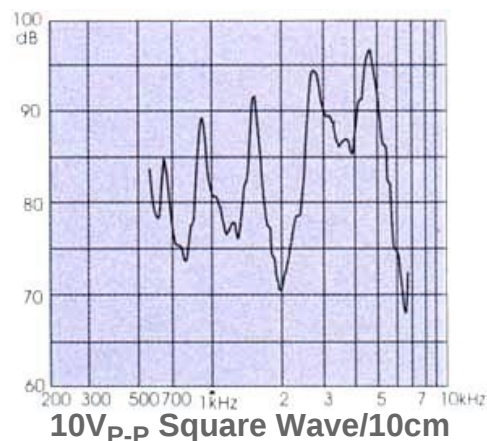

ELECTRICAL SPECIFICATIONS :


Model No.	SFM-1443
Min. Sound Pressure Level (dB)	88 /4.3kHz /10V _{p.p} Square Wave /10cm
Max. Consumption (mA)	4 /4.3kHz /10V _{p.p} Square Wave
Resonant Frequency (kHz)	4.3 ± 0.3
Capacitance at 120Hz (nF)	15 ± 30%
Allowable Input Voltage (V _{p.p})	20
Operating Temperature (°C)	-20 ~ +85
Weight (g)	2.4
Case Material/Colour	PPS/Black

PACKING INFORMATION:

TAPE TYPE INFORMATION:


The design for such tape packing was executed under standard IEC -286-3

The material of the tape is polystyrene in black color. detailed dimensions are as below :

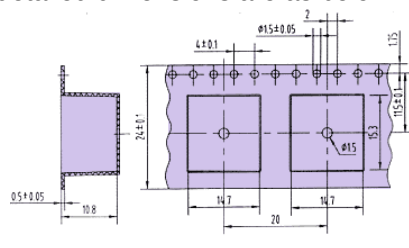

DIMENSIONS OF THE ROLLING PLATE:

The material of the rolling plate is in paper;
The dimensions of the rolling plate are as below:

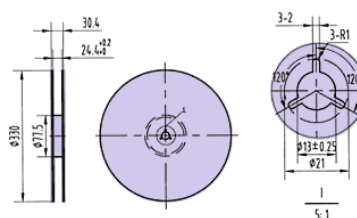

PACKING DIMENSIONS AND QUANTITY:

- The rolling plate is put into a 340X335X35mm inner packing box and is packed with 300 pcs of the transducer per plate
- The dimension of the outer carton is 400X350X350mm containing 10 inner boxes with a total quantity of 3000 pcs of the transducer
- The total gross weight per carton is 13Kgs,while net weight is 7.2Kgs.