



• SFM-1640




FEATURES:

- Super miniature
- Super thin
- Low current


APPLICATIONS:

- PDA (personal digital assistant)
- Miniature electronic device

DIMENSIONS: (Unit: mm)

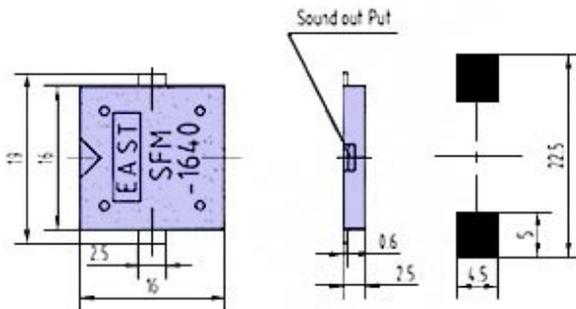

CHARACTERISTICS:

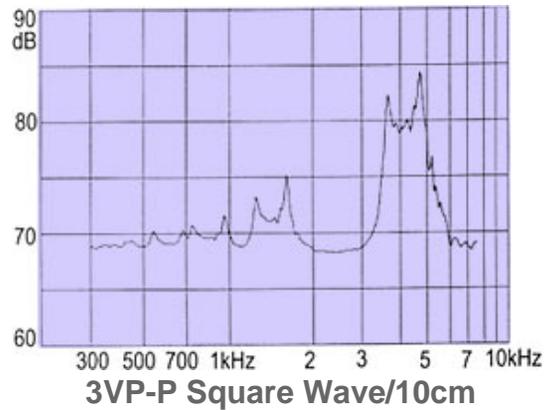


ELECTRICAL SPECIFICATIONS :	
Model No.	SFM-1640
Min. Sound Pressure Level (dB)	70 /4.0kHz /3Vp.p Square Wave /10cm
Max. Consumption (mA)	3 /4.0kHz /3Vp.p Square Wave
Resonant Frequency (kHz)	4.0 ± 0.5
Capacitance at 1000Hz (nF)	14 ± 30%
Allowable Input Voltage (Vp.p)	20
Operating Temperature (°C)	-20 ~ 70
Weight (g)	0.9
Case Material/Colour	PPS /Black

PACKING INFORMATION:


TAPE TYPE INFORMATION:

The design for such tape packing was executed under standard IEC -286-3
The material of the tape is polystyrene in black color. detailed dimensions are as below :

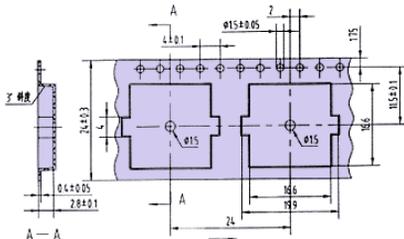

DIMENSIONS OF THE ROLLING PLATE:

The material of the rolling plate is in paper;
The dimensions of the rolling plate are as below:

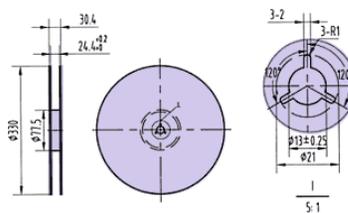

PACKING DIMENSIONS AND QUANTITY:

- The rolling plate is put into a 340X335X35mm inner packing box and is packed with 1000 pcs of the transducer per plate.
- The dimension of the outer carton is 400X350X350mm containing 10 inner boxes with a total quantity of 10,000 pcs of the transducer
- The total gross weight per carton is 16.5Kgs,while net weight is 9.0Kgs.