



SFM-1740S




**FEATURES:**

- Super miniature
- Super thin
- Low current


**APPLICATIONS:**

- Miniature electronic device

**DIMENSIONS: (Unit: mm)**

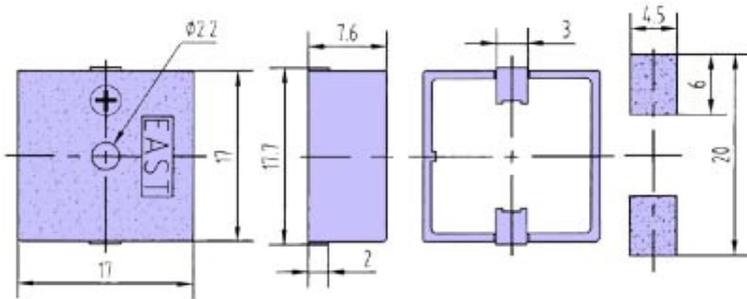

**CHARACTERISTICS:**

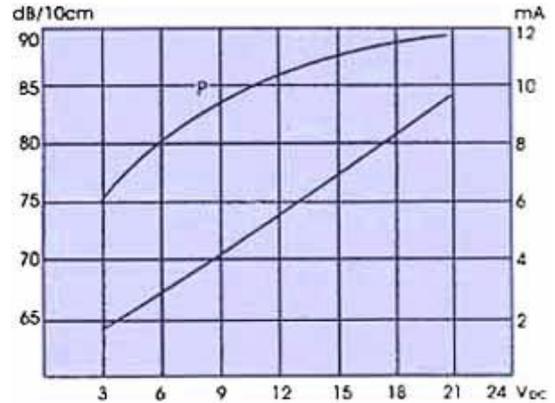


**ELECTRICAL SPECIFICATIONS :**

ELECTRICAL SPECIFICATIONS :	
<b>Model No.</b>	<b>SFM-1740S</b>
Min. Sound Pressure Level (dB)	85 /12V <sub>DC</sub> /10cm
Rated Voltage (V <sub>DC</sub> )	12
Operating Voltage (V <sub>DC</sub> )	6 ~ 16
Max. Consumption (mA)	8/12V <sub>DC</sub>
Oscillating Frequency (kHz)	4.0 ± 0.5
Tone Nature	Continuous
Operating Temperature (°C)	-20 ~ 70
Weight (g)	2
Case Material/Colour	PPS /Black

**PACKING INFORMATION:**


**TAPE TYPE INFORMATION:**

The design for such tape packing was executed under standard IEC -286-3  
The material of the tape is polystyrene in black color. detailed dimensions are as below :

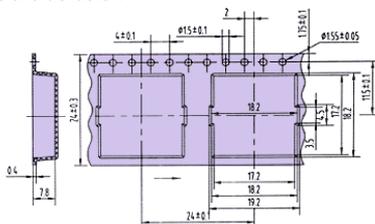

**DIMENSIONS OF THE ROLLING PLATE:**

The material of the rolling plate is in paper;  
The dimensions of the rolling plate are as below:

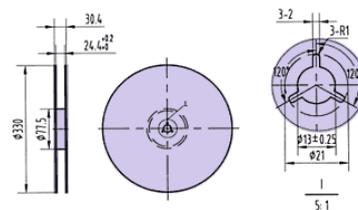

**PACKING DIMENSIONS AND QUANTITY:**

- The rolling plate is put into a 340X335X35mm inner packing box and is packed with 350 pcs of the transducer per plate
- The dimension of the outer carton is 400X350X350mm containing 10 inner boxes with a total quantity of 3500 pcs of the transducer
- The total gross weight per carton is 12.7Kgs,while net weight is 7.0Kgs.